REVISIONS

REV	DESCRIPTION	DATE	CHANGED BY
A	RELEASED FOR PRODUCTION	11/28/01	DFP
B	REVISED DIMS (ECN 1490)	09/09/03	MCCORMICK
C	ECN 3192: UPDATE DWG FORMAT	2/6/08	D.GRIFFIN

5.40 [137.16]

TINNED COPPER BRAID

∅.17 [4.32]

BNC PLUG

1.06 [26.92]

50Ω

RoHS Compliant ✓

L-com
CONNECTIVITY PRODUCTS

45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845
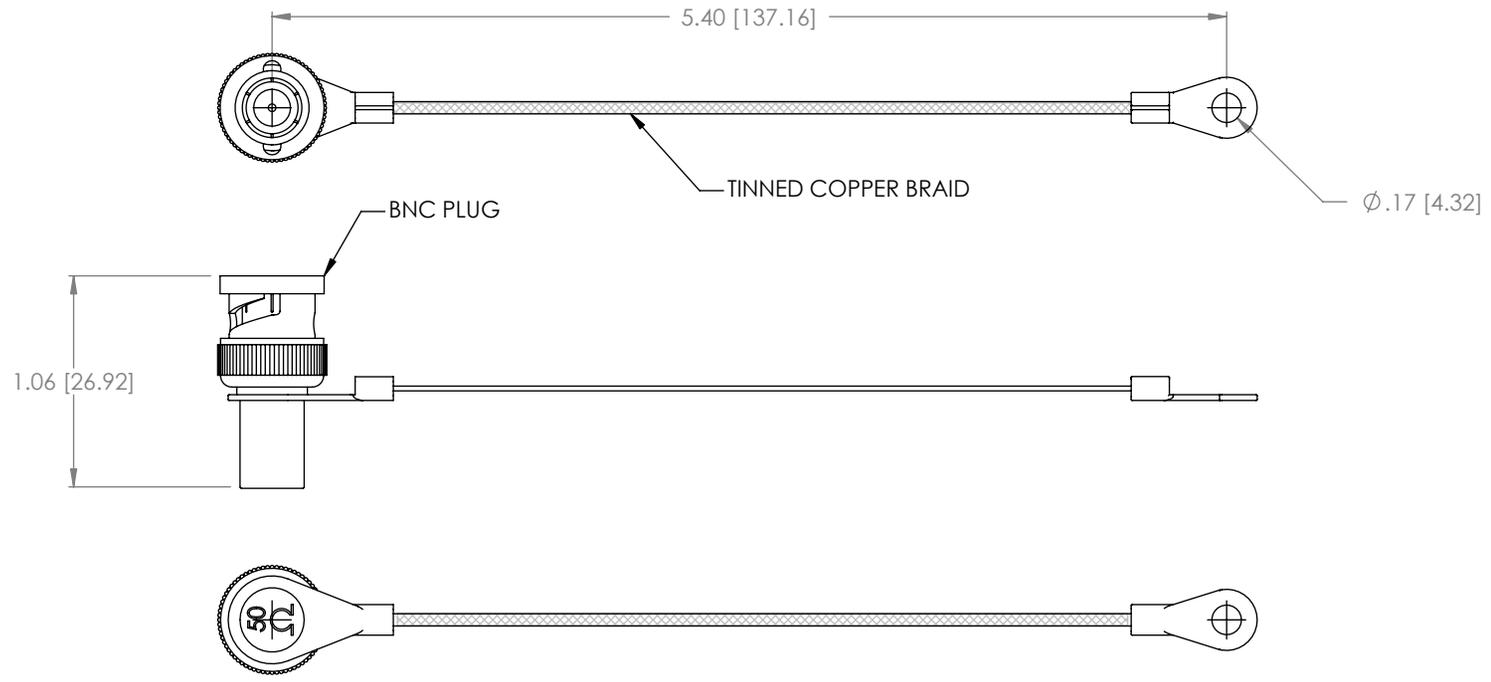
NOTE:

TERMINATOR HOUSING: NICKEL PLATED BRASS
RESISTOR: 1 WATT (LOW INDUCTANCE TYPE)

PACKAGING:
INDIVIDUALLY PACKAGE IN A POLYBAG

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
TOLERANCES TO BE:
.X ±.1 [2.5]   ANGLES ±2°
.XX ±.01 [.25]
.XXX ±.005 [.13]

OVERALL CABLE LENGTH TOL:
≤ 60 [1524] +3 [76.2] / - 0
> 60 [1524] +5% / -0%

PROJ

APPROVALS	DATE
DRAWN BY	
D PARHAM	11/26/2001
CHECKED BY	
T CLARK	11/26/2001
APPROVED BY	
R CARRICK	11/26/2001

CONFIGURATION DETAILS OF
UNDIMENSIONED FEATURES
MAY VARY

CATEGORY

COAXIAL

PRODUCT DESCRIPTION

TERMINATOR BNC M 50 OHM
W/GND CA

SIZE	FSCM NO.	DWG. NO.	REV.
A	43321	BM50G-1W	C

SCALE: NONE | CAD FILE: BM50G-1W.SLDDRW | SHEET 1 OF 1