




The following drawing sheet(s) represent components of:

HK2420-120NF

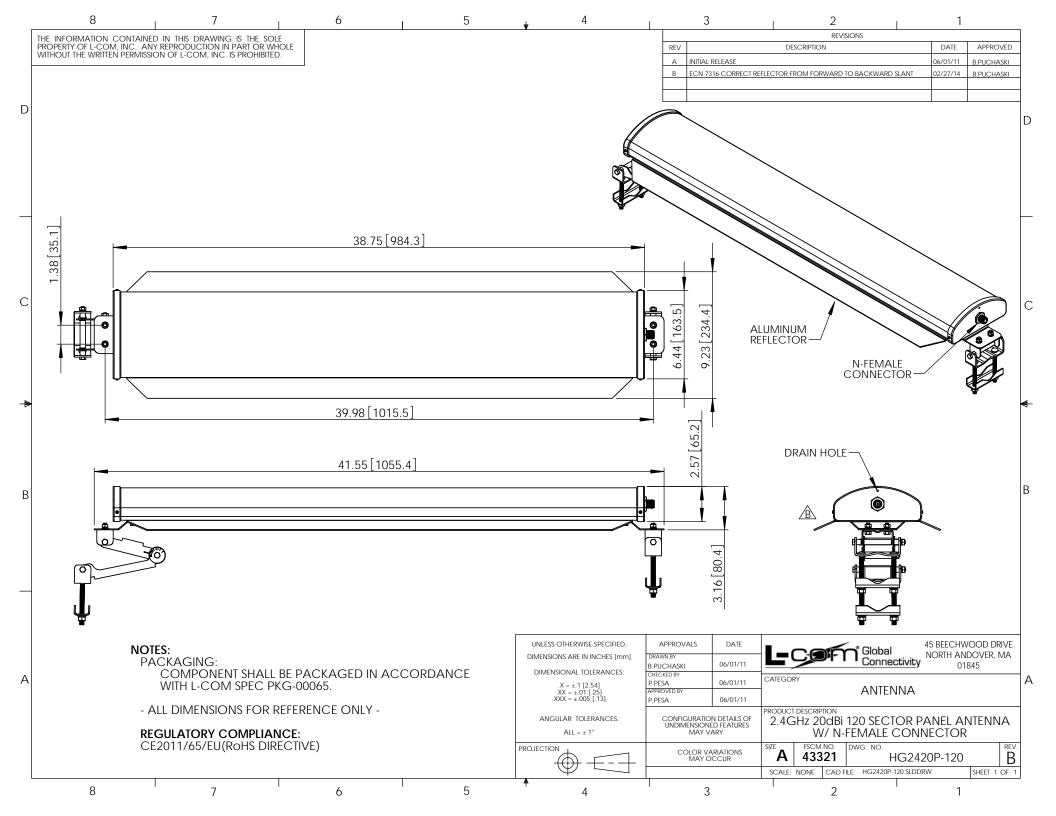

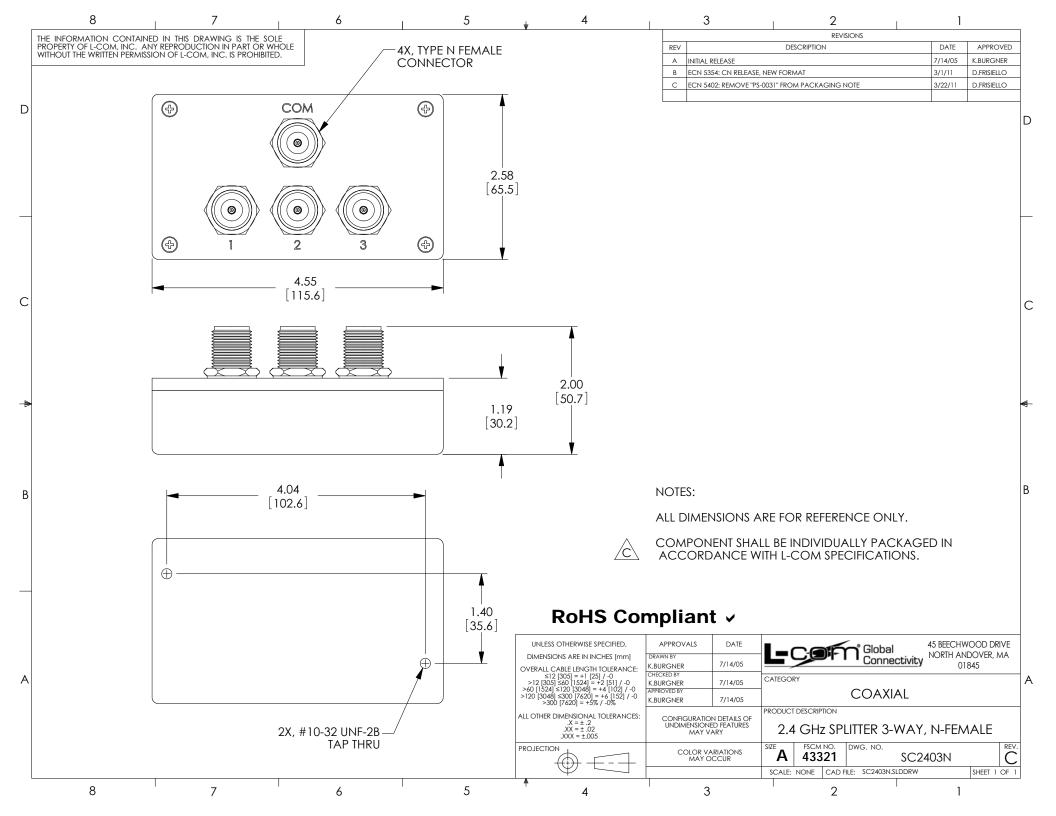

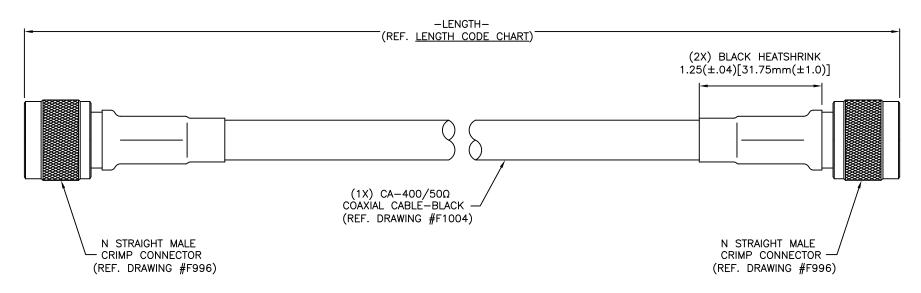

LENGTH CODE CHART										
CABLE# & LENGTH	LENGTH SYMBOL	EXAMPLES OF PART# USED								
CA3N <u>XXX</u>	WHERE XXX = LENGTH IN FEET	CA3N010 (10 FEET)								
CA3N <u>NXX</u>	WHERE NXX = LENGTH IN INCHES	CA3NN16 (16 INCHES)								
CA3N <u>MXX</u>	WHERE MXX = LENGTH IN METERS	CA3NM07 (7 METERS)								
CA3N <u>XMX</u>	WHERE XMX = LENGTH IN DECIMEL METERS	CA3N3M5 (3.5 METERS)								

NOTES:

- 1. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY
- 2. CABLE ASSEMBLY SHALL RECIEVE INSERTION LOSS TEST#TP-00079
- 3. CABLE ASSEMBLY SHALL WITHSTAND PULL TEST OF 4016s WITHOUT ANY SEPERATION OR ELECTRICAL FAILURE
- 4. CABLE SHALL BE ROHS COMPLIANT
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031
- 6. CENTER PIN OF CONNECTORS TO BE SOLDERED OR CRIMPED ONTO CABLE INNER CONDUCTOR

	UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES					SIZE	TITLE:			
	DIMENSIONS ARE IN INCIDES	D	4432	12/09/09	Changed Note#2 TP-00027 to TP-00079	,	FABRICATION: CA-400 SERIES			
	OVERALL CABLE LENGTH TOLERANCE	O	HL_4177	08/11/09	Changed Length Reference Points To Outside Ends of Connectors			N-MALE		
>1. >6	≤12 [305] = +1 [25]/-0 >12 [305] ≤ 60 [1524] = +2 [51] /-0 >60 [1524] ≤120 [3048]=+4/-0 >120 [3048] U+2264300 [7620] =+6/-0 >300 [76290]=+5%/-0	В	HL-ECN-0037	05/11/09	Change Tol. for Heatshrink from ±.06" & ±.15mm	ASSEMBLY with HEATSH			HEATSHRIN	K
		REV	ECN No.	DATE	DESCRIPTION	DRAWN	BY B.Puchaski	12/09/09	DRAWING No.	REV
		Global Tel: 48003451455 Capproctivity Copyright O 2009 L-com, Inc.			ORIGINAT	OR B.Puchaski	11/18/08	F990	$\mid D \mid$	
					Copyright 2009 L-com, Inc.	APPROV	AL M. Audus	08/11/09	PART No.CA3N[_ <u>VAR.</u> _]
		GOI II IBCUIVILY All rights reserved.				SCALE 1	:1 SHEET 1/1 N	MATERIAL No	ted FILE No. F99	3 0−01

