


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	05/16/2023	DFRISIELLO	GUTTADAURO

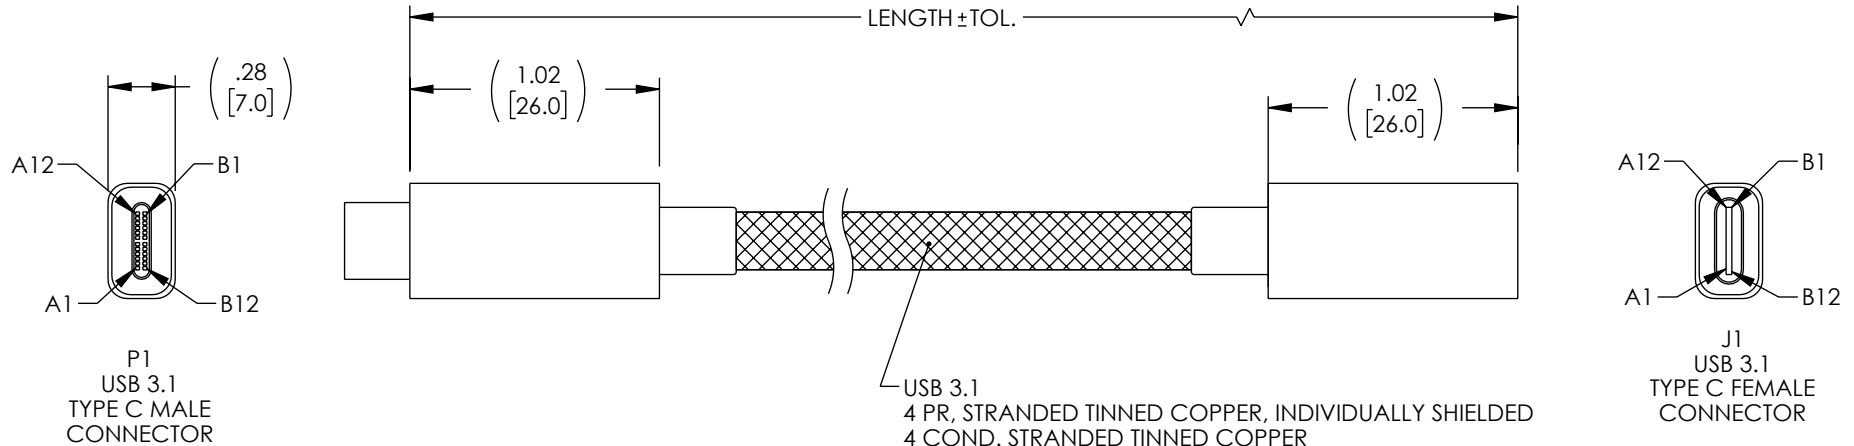

WIRING MAP



P1	J1		
A1,B1,A12,B12	GND	A1,B1,A12,B12	GND
A4,B4,A9,B9	VBUS	A4,B4,A9,B9	VBUS
A5	CC	A5	CC
B5		B5	
A6	Dp1	A6	Dp1
A7	Dn1	A7	Dn1
A2	SSTXp1	A2	SSTXp1
A3	SSTXn1	A3	SSTXn1
B11	SSRXp1	B11	SSRXp1
B10	SSRXn1	B10	SSRXn1
B2	SSTXp2	B2	SSTXp2
B3	SSTXn2	B3	SSTXn2
A11	SSRXp2	A11	SSRXp2
A10	SSRXn2	A10	SSRXn2
A8	SBU1	A8	SBU1
B8	SBU2	B8	SBU2
	SHELL		SHELL

ITEM NUMBER	LENGTH, IN [mm]	TOLERANCE, IN [mm]
CAU31CC-MF-1M	39.37 [1000.0]	±1.18 [30.0]
CAU31CC-MF-2M	78.74 [2000.0]	±1.18 [30.0]

NOTES:

PASS: 10Gbps/5A 20V TEST

1. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
2. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5] FRACTIONS ± 1/32 .XX = ±.02 [.5] ANGLES ±1° .XXX = ±.005 [.13]	APPROVALS	DATE	 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936
	DRAWN BY DFRISIELLO	05/16/2023	
THIRD-ANGLE PROJECTION 	CHECKED BY RCARLESCO	05/16/2023	CATEGORY USB 3.1
	APPROVED BY GUTTADAURO	05/16/2023	PRODUCT DESCRIPTION USB 3.1, CM/CF, Alum Shell, 20V/5A 10Gbps, Black Nylon Braid
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		
	COLOR VARIATIONS MAY OCCUR		
	SIZE A	CAGE CODE 43321	ITEM NO. CAU31CC-MF
	SCALE: NONE	CAD FILE: CAU31CC-MF.SLDDRW	SHEET 1 OF 1