

6

5

4


3

2

1


## REVISION

ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	B	ECO-13651	5/22/2024	DMAY	DGUST

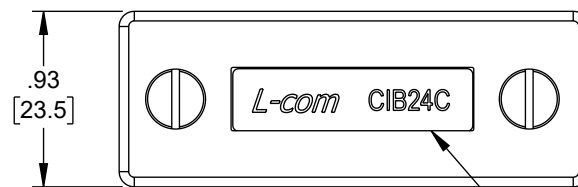


.93  
[23.5]

ADHESIVE LABEL

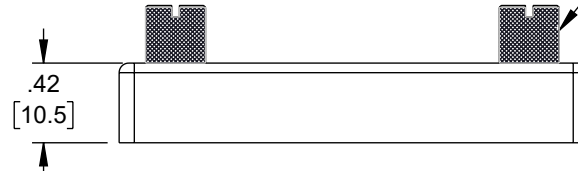

.42  
[10.5]

2X ISO M3X0.6 SCREWLOCK,  
KNURLED, CAPTIVE

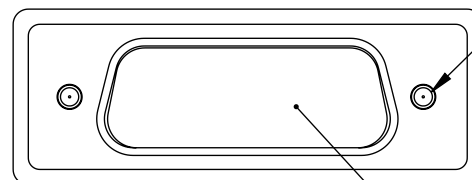

2X ISO M3X0.6 JACKSCREW

INSULATION FILM LINER

## NOTES:

- COVER FITS L-COM FEMALE IEEE-488 CABLE AND ADAPTOR CONNECTORS AND MOST SIMILAR PANEL CONNECTORS.
- MATERIALS:  
COVER: ZINC ALLOY, NICKEL PLATE FINISH  
SCREWS: STEEL, BLACK OXIDE FINISH  
INSULATING FILM: POLYESTER  
LABEL: SYNTHETIC PAPER ART PAPER, BLACK
- COVER MAKES CONDUCTIVE CONTACT WITH METAL SHELL OF CONNECTOR FOR EFFECTIVE EM/RFI SHIELDING.
- COVER SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

## REGULATORY COMPLIANCE:

CE2011/65/EU(RoHS DIRECTIVE)

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED  
LEADING DIMENSIONS ARE INCHES  
DIMENSIONS IN [ ] ARE MILLIMETERS

TOLERANCES:  
X = ±.2 [5]      FRACTIONS  
.XX = ±.02 [0.5]      ± 1/32  
.XXX = ±.005 [0.13]      ANGLES ± 1°

CABLE LENGTH TOLERANCES:  
≤12 [305] = +1 [25] / -0  
>12 [305] ≤ 60 [1524] = +2 [51] / -0  
>60 [1524] ≤ 120 [3048] = +4 [102] / -0  
>120 [3048] ≤ 300 [7620] = +6 [152] / -0  
>300 [7620] = +5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY  
AND SUBJECT TO CHANGE WITHOUT NOTICE.  
UN-DIMENSIONED/NON-CRITICAL FEATURES  
MAY VARY IN SIZE AND LOCATION  
COLORS MAY VARY

**L-com**  
an INFINIT® brand

Website: [www.L-com.com](http://www.L-com.com)  
Phone: 1.800.341.5266 | 1.978.682.6936



INTERPRET ALL DIMENSIONS AND  
TOLERANCES PER ASME Y14.5

SCALE	SHEET
NONE	1 OF 1

DESCRIPTION					
COVER FOR FEMALE IEEE-488 CONNECTOR					
SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV	
A	43321	DMAY	CIB24C	B	

6

5

4

3

2

1