


8 7 6 5 4 3 2 1

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.



REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	11/17/20	PHOSPODAR

WIRING MAP			
PAIR	LC	1X24	REF DES
P1	1	1	J1
	13	13	
P2	2	2	
	14	14	
P3	3	3	
	15	15	
P4	4	4	
	16	16	
P5	5	5	
	17	17	
P6	6	6	
	18	18	
P7	7	7	
	19	19	
P8	8	8	
	20	20	
P9	9	9	
	21	21	
P10	10	10	
	22	22	
P11	11	11	
	23	23	
P12	12	12	
	24	24	

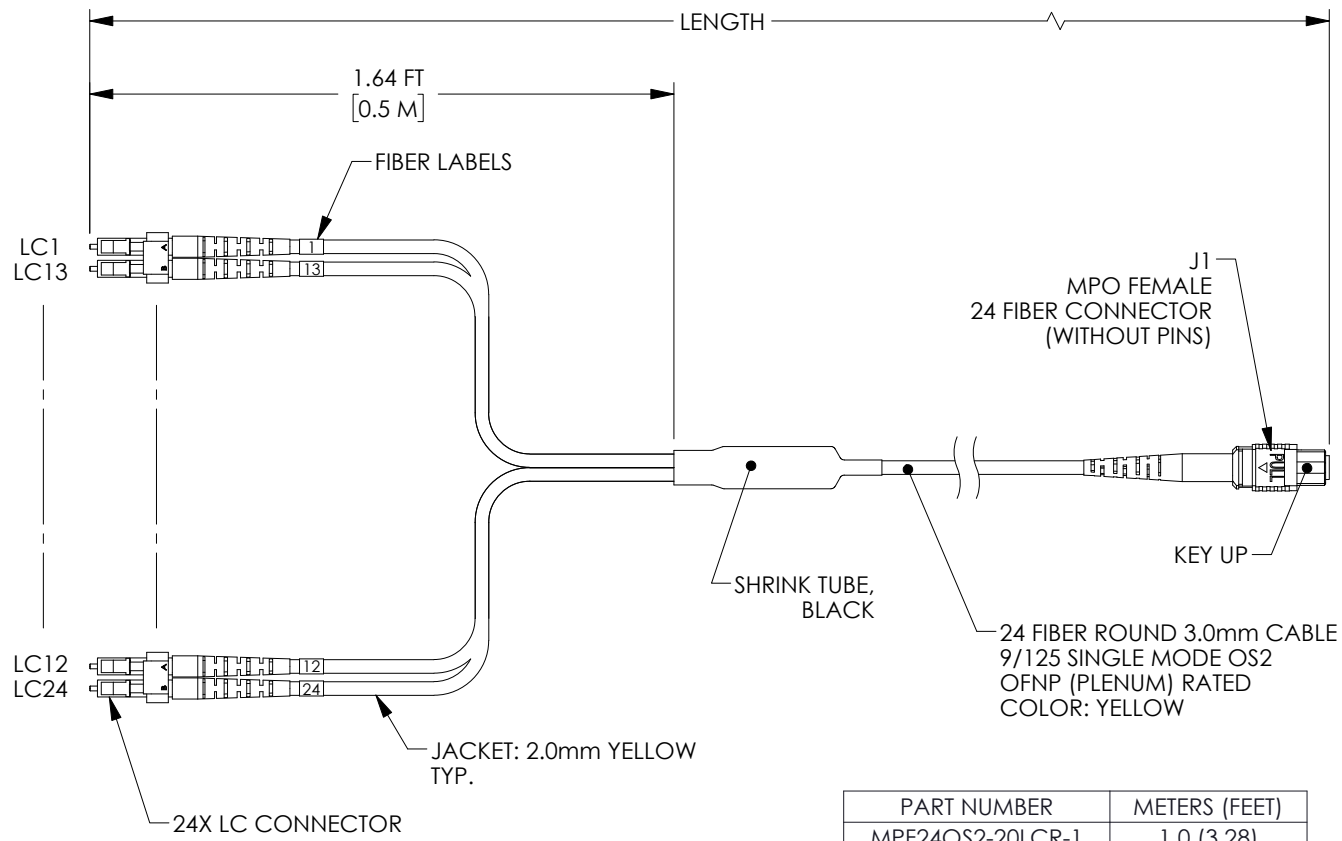

PART NUMBER	METERS (FEET)
MPF24OS2-20LCR-1	1.0 (3.28)
MPF24OS2-20LCR-3	3.0 (9.84)
MPF24OS2-20LCR-5	5.0 (16.40)
MPF24OS2-20LCR-10	10.0 (32.81)

- NOTES:
- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
 - CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]	APPROVALS	DATE	 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936
	OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0	DRAWN BY DFRISIELLO 11/17/2020	
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [.5] ANGLES ± 1° .XXX = ± .005 [.13]	APPROVED BY PHOSPODAR 11/17/2020	CATEGORY FIBER OPTICS	PRODUCT DESCRIPTION MPO w/o pins to LC fanout fiber, 2.0mm diameter, 12 fiber, OS2 9/125um
	THIRD-ANGLE PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	
COLOR VARIATIONS MAY OCCUR		CAGE CODE 43321	ITEM NO. MPF24OS2-20LCR
SCALE: NONE		CAD FILE: MPF24OS2-20LCR.SLDDRW	REV. A