


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVAL
A	REV A DRAWING RELEASED	10/28/2019	DGUTTADAUR

CROSS-SECTIONAL VIEW

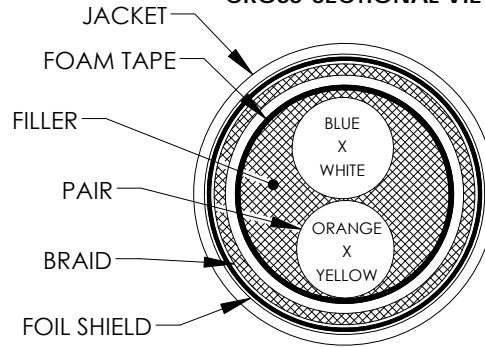

COLOR CODE:
 1) BLUE X WHITE
 2) ORANGE X YELLOW

NOTES:

1. CONSTRUCTION:
- CONDUCTOR: 22 AWG SOLID TINNED COPPER
 - INSULATION: HIGH DENSITY POLYETHYLENE, .012" NOM. WALL THICKNESS
 - PAIRS: COLOR CODED SINGLES TWISTED INTO PAIRS
 - CABLE: (2) TWISTED PAIRS TWISTED TOGETHER WITH FILLER AND WRAPPED WITH A FOAM POLYPROPYLENE TAPE TO FORM A CABLE CORE.
 - SHIELD: AN OVERALL SHIELD OF 38AWG TINNED COPPER BRAID (75% MIN. COVERAGE), SHALL BE APPLIED OVER THE CABLE CORE. A SECOND SHIELD OF AN OVERALL ALUMINIZED POLYESTER FOIL SHIELD (FOIL IN, 100% COVERAGE) SHALL BE APPLIED OVER THE BRAID.
 - JACKET: THERMOPLASTIC ELASTOMER, GREEN (CR# 70) .043" NOM. WALL THICKNESS (PRESSURE)
2. PHYSICAL PROPERTIES:
- TEMPERATURE RATING, MAX. 75°C & 80°C (JACKET 105°C, 75°C OIL)
 - TEMPERATURE RATING, MIN. -40°C (MANUFACTURER'S RECOMMENDED)
 - WT./M', NOM., NET. 49.1 LBS.
 - JACKET IS WELD SPATEER RESISTANT
 - JACKET IS SUNLIGHT RESISTANT
 - JACKET IS CUTTING/MACHINING OIL RESISTANT
 - POE COMPLIANT (802.3 af) TO 100 METERS WHEN INSTALLED PER RECOMMENDATIONS IN TIA-184. CABLE WILL MEET CAT 5e CHANNEL REQUIREMENTS TO 100 METER LENGTH.
3. AGENCY APPROVALS:
- UL AWM STYLE 2463 (80°C 600V)
 - NEC (UL) TYPE PLTC
 - NEC (UL) TYPE ITC
 - PENNSYLVANIA D.E.P. - MSHA
4. APPLICATION:
- HORIZONTAL CABLE FOR PROFINET TYPE A CAT 5e APPLICATIONS. RoHS COMPLIANT MATERIALS. U.S. PATENT #8,487,184 B2
5. PRINT: (BLACK INK)
- QUABBIN DATAMAX INDUSTRIAL PROFINET TYPE A CAT 5E SHIELDED P/N 5923 -- U.S. PATENT NO. 8,487,184 B2 -- (UL) TYPE PLTC 2PR 22AWG SF/UTP 75C SUNLIGHT RESISTANT OIL RES II OR ITC OR AWM 2463 80C 600V -- P-07-KA140018-MSHA -- RoHS -- (LOT DESIGNATOR) (SEQUENTIAL FOOTAGE)
6. ELECTRICAL CHARACTERISTICS: (FOR 100m OF CABLE)
- CAPACITANCE, MUTUAL, NOM. 13.5 PF/FT AT 1 MHz
 - DIELECTRIC WITHSTANDING, MIN. 2000V RMS
 - VOLTAGE RATING, MAX. 600V
 - D.C. RESISTANCE, MAX. 6.2 OHM
 - IMPEDANCE 100 +/- 15 Ω, 1 - 100 MHz
- RETURN LOSS:
- 1 ≤ f < 10 MHz 20 + 5 LOG (f) dB MIN
 - 10 ≤ f < 20 MHz 25dB MIN
 - 20 ≤ f < 100 MHz 25 - 7 LOG(f/20) dB MIN

NOM. DIA.
.0254"
.050"
.100"
.200"
.219"
.305" (.315" MAX.) BY PI TAPE

7. PACKAGING:

PART NUMBER	PACKAGING
TFDP501-100	COIL
TFDP501-500	SPOOL
TFDP501-1000	SPOOL

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] - 60 [1524] = +1 [25] / -0 >60 [1524] - 120 [3048] = +4 [102] / -0 >120[3048] - 300[7620] = +6 [152] / -0 >300[7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = .2 [5.08] .XX = .02 [51] .XXX = .005 [13]	APPROVALS	DATE	50 HIGH STREET NORTH ANDOVER, MA 01845		
	DRAWN BY DFRISIELLO	10/25/2019			CHECKED BY DGUTTADAURO
PROJECTION 	APPROVED BY DGUTTADAURO	10/28/2019	CATEGORY TELECOM/MODULAR		
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		PRODUCT DESCRIPTION PROFINET C5E 2PR 22SLD SF/UTP PLTC TPE GRN		
COLOR VARIATIONS MAY OCCUR		SIZE A	FSCM NO. 43321	DWG. NO. TFDP501	REV. A
		SCALE: N/A		CAD FILE: TFDP501.SLDDRW	SHEET 1 OF 1