

Photoelectric Sensor, Square PBT housing, L.on/D.on selectable, NPN, diffuse reflection with BGS, sensing distance 1cm-30cm, 2m 3-wire cable



## PXPEESB-30N

### Photoelectric Sensor

#### Features

- Common form factor
- Fast response time
- LED indicators
- IP65 protection

#### Applications

- Manufacturing
- Automotive
- Food and Beverage
- Warehouse Automation
- Robotics

#### Description

The L-com PXPEESB-30N is a photoelectric sensor developed to determine the proximity, absence, or presence of an item using a light transmitter. This sensor uses diffuse reflection-BGS as a detection method and has a PBT housing. The diffuse reflection-BGS sensor has a square shape, an LED indicator, and a single NPN output.

#### General Specifications

Sensing Type	Diffuse Reflection-BGS
Design Type	Square
Output Type	NPN
Sensing Distance	10 to 300 mm
Supply Voltage	10-30 VDC
IP Rating	IP65
Accessories	Screwdriver
Housing Material	PBT
Ambient Brightness	<5,000 Lux
Ambient Temperature	-25 to 55 deg C
Connection Method	2M 3-wire cable
Indicator	Operation indicator: Green; Motion indicator: Red
Switch Type	L.on/D.on selectable
Sensitivity Adjustment	6 turns

(For more information please consult User Manual)

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:  
[Photoelectric Sensor, Square PBT housing, L.on/D.on selectable, NPN, diffuse reflection with BGS, sensing distance 1cm-30cm, 2m 3-wire cable](#)

Photoelectric Sensor, Square PBT housing, L.on/D.on selectable, NPN, diffuse reflection with BGS, sensing distance 1cm-30cm, 2m 3-wire cable




## PXPEESB-30N

### Photoelectric Sensor

#### Circuit Diagram

#### NPN Output

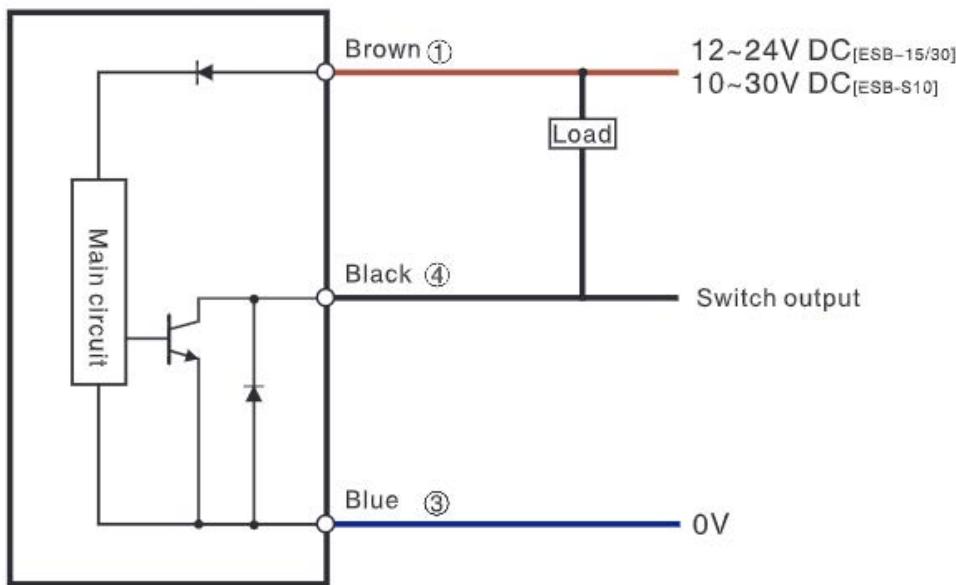

#### Environmental Specifications

##### Humidity

Operating Relative

35% to 85%

Photoelectric Sensor, Square PBT housing, L.on/D.on selectable, NPN, diffuse reflection with BGS, sensing distance 1cm-30cm, 2m 3-wire cable from L-com has same day shipment for domestic and International orders. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

Photoelectric Sensor, Square PBT housing, L.on/D.on selectable, NPN, diffuse reflection with BGS, sensing distance 1cm-30cm, 2m 3-wire cable

**L-com CAD Drawing**

