

Lead Free Bend Relief TRB 3-Slot Plug to Bend Relief TRB 3-Lug Jack Insulated Bulkhead 1553 Cable Using 124 Ohm TWC-124-2, 36" Coax



LC3MSA00659-36

Configuration

- Connector 1: TRB 3-Slot Plug
- Connector 2: TRB 3-Lug Jack Bulkhead Insulated
- Cable Type: TWC-124-2

Features

- 124 ohms
- Twinaxial
- MIL-STD-1553B
- -40°C to +80°C
- Lead Free Solder
- Standard and Custom Lengths Available
- Bend Relief
- Insulated

Applications

- MIL-STD-1553B Applications
- Data Transmission

Description

L-com's LC3MSA00659-36 is a lead free bend relief TRB 3-Slot plug to bend relief TRB 3-Lug jack insulated bulkhead 1553 cable using 124 Ohm TWC-124-2, 36" coax and ships same-day. These flexible RF cable assemblies are ideal for applications where flexure is required. Our L-com TRB 3-Slot to TRB 3-Lug cable assembly has a plug to jack gender configuration with 124 Ohm flexible TWC-124-2 series coax and operates to 500 MHz. L-com's LC3MSA00659-36 is a Twinax bend relief 3-slot plug to insulated bulk head 3-lug cable jack .3 cable assembly from L-Com. These MIL-STD-1553 Twinaxial cable assemblies are the most popular cable assemblies used in wide interconnect applications to be used with bus couplers, avionics control boxes, and bus relays.

The LC3MSA00659-36 Twinax bend relief 3-slot plug to insulated bulk head 3-lug cable jack .3 MIL-STD-1553 cable assemblies are bend/strain relief. These cable assemblies have Twinax connectivity and are ideal for applications such as Aircraft avionics and test labs. These cable assemblies can withstand severe shocks and vibrations, making them critical avionics components. The Twinax bend relief 3-slot plug to insulated bulk head 3-lug cable jack .3 cable assemblies have a robust design and are easy to use.

L-com has one of the largest in-stock selections of Twinax bend relief 3-slot plug to insulated bulk head 3-lug cable jack .3 MIL-STD-1553 cable assemblies with same-day shipment. Make your online purchase right now to take advantage of our same-day shipping. For further information on similar products, our expert technical support and knowledgeable sales team can help you get the ideal Twinax bend relief 3-slot plug to insulated bulk head 3-lug cable jack .3 MIL-STD-1553 cable assemblies for your requirements.

Custom versions of this TRB 3-Slot plug to TRB 3-Slot jack cable, along with the rest of L-com's other RF assemblies, can also be built and shipped same day. Other available RF cable assembly value added services from L-com include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly. Contact a sales representative for testing or custom RF cable quotes. Part number LC3MSA00659-36 L-com Lead Free Bend Relief TRB 3-Slot Plug to Bend Relief TRB 3-Lug Jack Insulated Bulkhead 1553 Cable Using 124 Ohm TWC-124-2, 36" Coax data sheet PDF includes details of the RF product specifications, CAD drawing(s) and dimensions below.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		500	MHz
Capacitance		12.3 [40.35]		pF/ft [pF/m]
Operating Voltage (AC)			1,000	Vrms

Lead Free Bend Relief TRB 3-Slot Plug to Bend Relief TRB 3-Lug Jack Insulated Bulkhead 1553 Cable Using 124 Ohm TWC-124-2, 36" Coax



LC3MSA00659-36

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	10	50	100	200	500	MHz
Insertion Loss (Typ.)	0.251	0.308	0.353	0.416	0.542	dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1 dB per connector.

Mechanical Specifications

Cable Assembly

Length*	36 in [914.4 mm]
Weight	0.233 lbs [105.69 g]

Cable

Cable Type	TWC-124-2
Impedance	124 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper, Silver
Dielectric Type	PE
Shield Layer 1	Silver Plated Copper
Jacket Material	PVC, Blue

One Time Minimum Bend Radius	1.25 in [31.75 mm]
------------------------------	--------------------

Connectors

Description	Connector 1	Connector 2
Type	TRB 3-Slot Plug	TRB 3-Lug Jack Bulkhead Insulated
Specification	MIL-STD-1553	MIL-STD-1553
Impedance	124 Ohms	124 Ohms
Contact Material and Plating	Bronze, Gold 30 micro inches	Bronze, Gold 30 micro inches
Contact Plating Specification	ASTM-B-488	ASTM-B-488
Dielectric Type	Teflon	Teflon
Outer Conductor Material and Plating	Phosphor Bronze, Gold	Phosphor Bronze, Gold
Outer Conductor Plating Specification	30 micro inches	30 micro inches
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	ASTM-B-733	ASTM-B-733

Lead Free Bend Relief TRB 3-Slot Plug to Bend Relief TRB 3-Lug Jack Insulated Bulkhead 1553 Cable Using 124 Ohm TWC-124-2, 36" Coax



LC3MSA00659-36

Environmental Specifications

Temperature

Operating Range -40 to +80 deg C

Compliance Certifications (see [product page](#) for current document)


Plotted and Other Data

Notes:

How to Order

Part Number Configuration:

LC3MSA00659 - xx uu

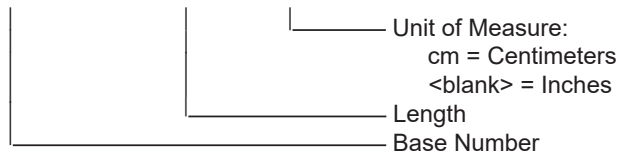


Example: LC3MSA00659-12 = 12 inches long cable
LC3MSA00659-100cm = 100 cm long cable

Lead Free Bend Relief TRB 3-Slot Plug to Bend Relief TRB 3-Lug Jack Insulated Bulkhead 1553 Cable Using 124 Ohm TWC-124-2, 36" Coax from L-com has same day shipment for domestic and International orders. L-com is a leading manufacturer of wired and wireless connectivity products and committed to in-stock availability and same day shipping. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.ontained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

Lead Free Bend Relief TRB 3-Slot Plug to Bend Relief TRB 3-Lug Jack Insulated Bulkhead 1553 Cable Using 124 Ohm TWC-124-2, 36" Coax

L-com CAD Drawing

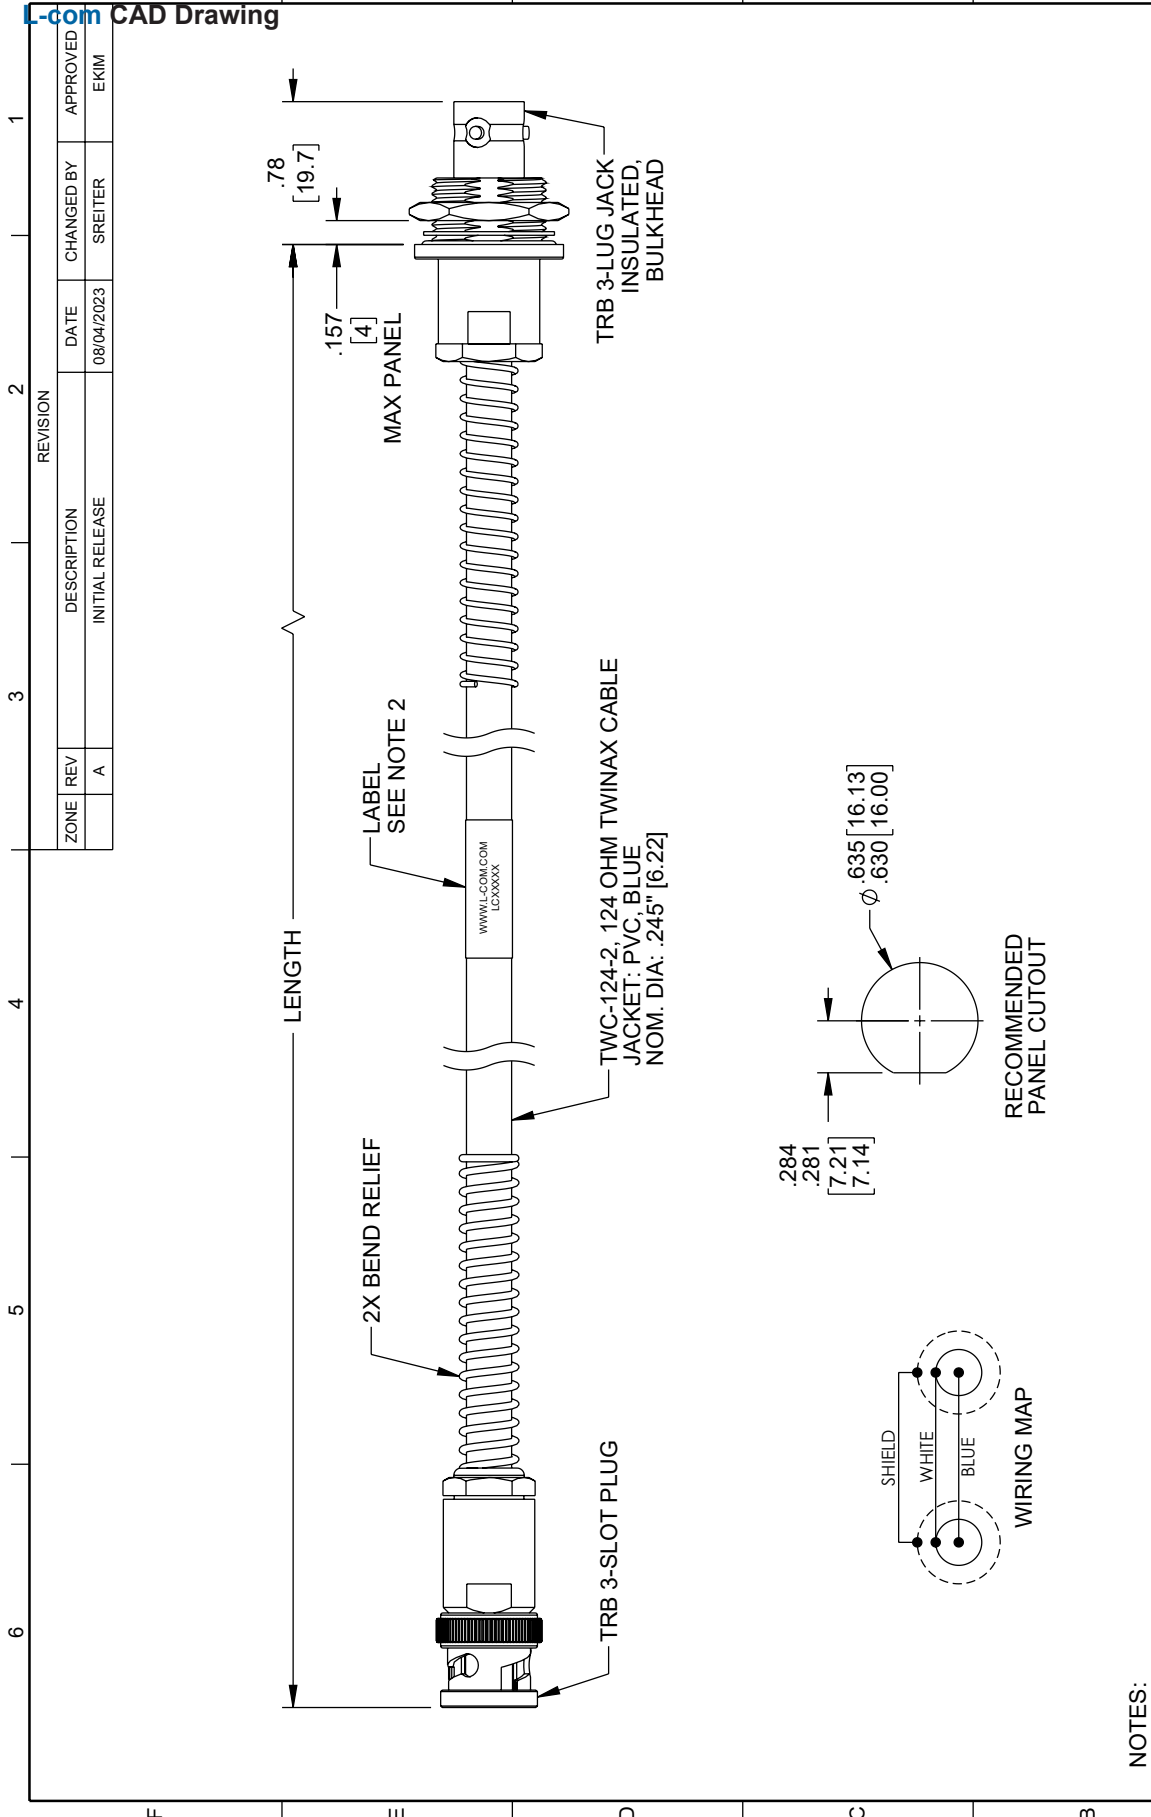

UNLESS OTHERWISE SPECIFIED, LEADING DIMENSIONS ARE IN INCHES, UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN [] ARE MILLIMETERS.		L-com® an INFINITE® brand Website: www.L-com.com Phone: 1.800.341.5266 1.978.682.6936		INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5
TOLERANCES:	FRACTIONS .X = ±.2 [5] .XX = ±.02 [0.5] .XXX = ±.005 [0.13]	ANGLES ± 1°	SCALE NONE	SHEET 1 OF 1
CABLE LENGTH TOLERANCES:	<12 [305] ±.125 [-0] >12 [305] ≤ 60 [1524] = +.2 [5] / -0 >60 [1524] ≤ 120 [3048] = +.4 [102] / -0 >120 [3048] ≤ 300 [7620] = +.6 [152] / -0 >300 [7620] = +.5% / -0			
ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE UNLESS OTHERWISE SPECIFIED. DIMENSIONS MAY VARY. COLORS MAY VARY.				
DESCRIPTION BEND RELIEF TRB 3-SLOT PLUG TO BEND RELIEF TRB 3-LUG JACK INSULATED BULKHEAD 1553 CABLE USING 124 OHM TWC-124-2 COAX	SIZE A	DRWN BY SREITER	ITEM NO. LC3MSA00659	REV A

- NOTES:
- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
 - CABLE ASSEMBLY LENGTH LABEL PLACEMENT: 36 INCH OR LESS, ONE LABEL APPROXIMATELY CENTERED. LONGER THAN 36 INCH, TWO LABELS APPROXIMATELY 6 INCHES FROM EACH CONNECTOR.
 - CABLE ASSEMBLY LENGTH DETERMINED BY P/N AS ILLUSTRATED: FM3MSA00659-XX (-XX = OAL IN INCHES)
- THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.