

#### LCCN45882

## Configuration

- · SMP Plug Connector
- 50 Ohms
- · Right Angle Body Geometry

#### **Features**

- Max. Operating Frequency 12.4 GHz
- Excellent VSWR of 1.25:1
- · Gold over Copper Plated Beryllium Copper Contact

## **Applications**

- · General Purpose Test
- · Custom Cable Assemblies
- Medical

- RG316 Interface Type
- Crimp/Solder Attachment
- · Non-Magnetic Design
- · Blind Mate Connector
- Magnetic Susceptibility 10⁻⁵
- · Military and Aerospace
- Quantum Computing

#### **Description**

SMP Non-Magnetic Right Angle Plug Crimp type Connector LCCN45882 from L-Com is in stock at our warehouse and ready to ship on the same-day of your order. The LCCN45882 is a SMP Non-magnetic right-angle plug crimp type Connector with RG316. These Non-Magnetic Connector frequency ranges from 0-12.4 GHz with 50 Ohms impedance.

Our RF coaxial connector specialists are available to answer any questions or concerns you have on the LCCN45882 SMP Plug Right Angle Non-Magnetic Connector. Our Non-magnetic connectors have a susceptibility of around 10<sup>-5</sup>, as opposed to 10<sup>-2</sup> for standard connectors made of brass/nickel materials. As a result, our non-magnetic connectors are transparent to the magnetic field, which means no field distortion and a higher Signal-to-Noise Ratio (SNR).

Contact L-Com's expert technical support for assistance with the SMP Non-Magnetic right angle plug crimp type Connector or any RF coaxial cable connectors or cable assemblies. Download our LCCN45882 datasheet with specifications and CAD drawing with dimensions for details. Our knowledgeable sales team simplifies the purchasing process and ensures that your SMP Non-magnetic RF coaxial connector will be exact to your specifications. The target audience for the right-angle coaxial plug is for quantum computing, the military and aerospace industries as well as the medical industry including MRI and patient monitoring devices.

The LCCN45882 connector from L-Com uses a dedicated manufacturing process and raw material selection to guarantee the low magnetic susceptibility level of the connectors. The SMP right angle RF coax connector is available now from L-Com. We have no MOQ (minimum order quantity) and the connector ships the very same day from our warehouse.

# **Electrical Specifications**

Description	Minimum	Typical	Maximum	Units		
Frequency Range	DC		12.4	GHz		
VSWR			1.25:1			
Insertion Loss			0.12	dB		
Operating Voltage (AC)			250	Vrms		
Dielectric Withstanding Voltage (AC)			750	Vrms		
Insulation Resistance	5,000			MOhms		





#### LCCN45882

RF Leakage	55	dB

### **Mechanical Specifications**

Size

 Length
 10.60 in [269.24 mm]

 Width
 2.90 in [73.66 mm]

 Height
 2.90 in [73.66 mm]

 Weight
 0.00 lbs [0.49 g]

 Mating Cycles
 500 Cycles

### **Material Specifications**

Description	Material	Plating	
Contact	Beryllium Copper	Gold over Copper	
Body	Bronze	Copper-Tin-Zinc Alloy	

# **Environmental Specifications**

**Temperature** 

Operating Range -55deg C to +125deg C



#### LCCN45882

Compliance Certifications (see product page for current document)


**Plotted and Other Data** 

**Assembly Instruction** 





### LCCN45882

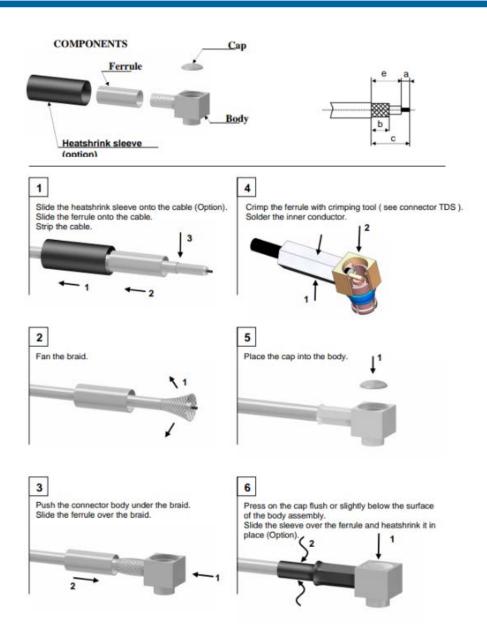



### LCCN45882

SMP Plug Right Angle Non-Magnetic Connector Crimp/Solder Attachment for RG316 from L-com has same day shipment for domestic and International orders. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components. Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMP Plug Right Angle Non-Magnetic Connector Crimp/Solder Attachment for RG316 LCCN45882

URL: https://www.l-com.com/smp-male-right-angle-connector-crimp-solder-attachment-lccn45882-p.aspx

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.ontained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

## **L-com CAD Drawing**

