


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISION

ZONE	REV.	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	05/18/2023	PSRINIVAS	AGANWANI

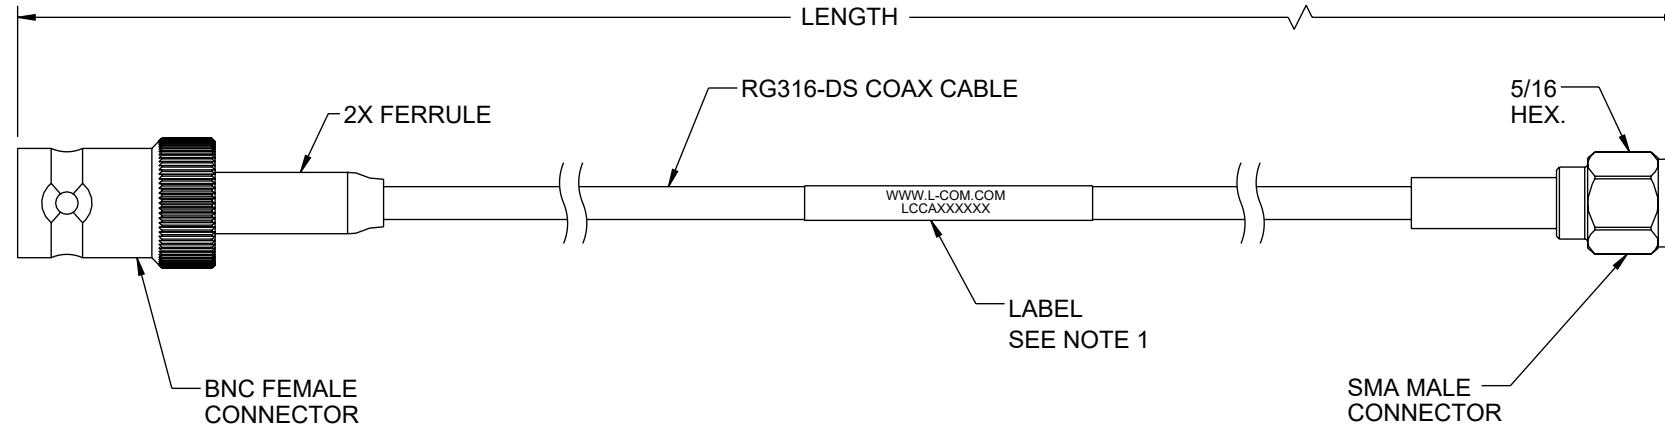

NOTES:

1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED. LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES FROM EACH CONNECTOR.
2. CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.
3. CABLE ASSEMBLY SHALL RECEIVE INSERTION LOSS TEST PER L-COM SPECIFICATIONS.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]	APPROVALS	DATE	 <p>50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936</p> <p>CATEGORY</p> <p>COAXIAL</p>
OVERALL CABLE LENGTH TOLERANCE:			
≤ 12 [305] = $+1$ [25] / -0			
> 12 [305] ≤ 60 [1524] = $+2$ [51] / -0			
> 60 [1524] ≤ 120 [3048] = $+4$ [102] / -0			
> 120 [3048] ≤ 300 [7620] = $+6$ [152] / -0			
> 300 [7620] = $+5\%$ / -0			
ALL OTHER DIMENSIONAL TOLERANCES: . X = $\pm .2$ [5] FRACTIONS . XX = $\pm .02$ [5.] $\pm 1/32$.XXX = $\pm .005$ [.13] ANGLES $\pm 1^\circ$	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	PRODUCT DESCRIPTION	
THIRD-ANGLE PROJECTION	COLOR VARIATIONS MAY OCCUR	SIZE A	CAGE CODE 43321
		ITEM NO. LCCA31397	REV. A
	SCALE: NONE	CAD FILE: LCCA31397.SLDDRW	SHEET 1 OF 1