

Lead Free 1553 TRB 2-Slot Plug to Blunt Cut Genderless Cable Assembly using M17/176-00002 Coax, 3 FT



## LC3MSA00463-36

### Configuration

- Connector 1: TRB 2-Slot Plug
- Connector 2: Blunt Cut Genderless
- Cable Type: M17/176-00002

### Features

- MIL-STD-1553
- -55°C to +200°C
- 78 ohms

### Applications

- Vehicle High Temperature
- Data
- MIL-STD-1553

### Description

L-com's LC3MSA00463-36 is a lead free 1553 TRB 2-Slot plug to blunt cut genderless cable assembly using M17/176-00002 coax, 3 FT and ships same-day. These flexible RF cable assemblies are ideal for applications where flexure is required. Our L-com TRB 2-Slot to Blunt Cut cable assembly has a plug to genderless gender configuration with 78 Ohm flexible M17/176-00002 series coax and operates to 10 MHz.

Custom versions of this TRB 2-Slot plug to TRB 2-Slot genderless cable, along with the rest of L-com's other RF assemblies, can also be built and shipped same day. Other available RF cable assembly value added services from L-com include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly. Contact a sales representative for testing or custom RF cable quotes. Part number LC3MSA00463-36 L-com Lead Free 1553 TRB 2-Slot Plug to Blunt Cut Genderless Cable Assembly using M17/176-00002 Coax, 3 FT data sheet PDF includes details of the RF product specifications, CAD drawing(s) and dimensions below.

### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		10	MHz
Capacitance		24 [78.74]		pF/ft [pF/m]
Operating Voltage (AC)			750,000	Vrms

Insertion Loss (Typ.)  
Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1 dB per connector.

### Mechanical Specifications

#### Cable Assembly

Length\* 36 in [914.4 mm]  
Weight 0.074 lbs [33.57 g]

#### Cable

Cable Type M17/176-00002  
Impedance 78 Ohms

Lead Free 1553 TRB 2-Slot Plug to Blunt Cut Genderless  
Cable Assembly using M17/176-00002 Coax, 3 FT



## LC3MSA00463-36

Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper, Silver
Dielectric Type	PTFE
Shield Layer 1	Silver Plated Copper
Jacket Material	PFA, Blue
One Time Minimum Bend Radius	1.5 in [38.1 mm]

### Connectors

Description	Connector 1	Connector 2
Type	TRB 2-Slot Plug	Blunt Cut Genderless
Impedance	78 Ohms	
Contact Material and Plating	Bronze, Gold 30 micro inches	
Contact Plating Specification	ASTM-B-488	
Dielectric Type	Teflon	
Outer Conductor Material and Plating	Phosphor Bronze, Gold	
Outer Conductor Plating Specification	30 micro inches	
Body Material and Plating	Brass, Nickel	
Body Plating Specification	ASTM-B-733	

### Environmental Specifications

#### Temperature

Operating Range -55 to +200 deg C

### Compliance Certifications (see [product page](#) for current document)

### Plotted and Other Data

Notes:


Lead Free 1553 TRB 2-Slot Plug to Blunt Cut Genderless  
Cable Assembly using M17/176-00002 Coax, 3 FT



## LC3MSA00463-36

### How to Order

Part Number Configuration:

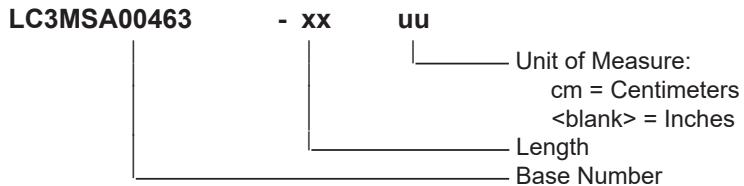

Example: LC3MSA00463-12 = 12 inches long cable  
LC3MSA00463-100cm = 100 cm long cable

Lead Free 1553 TRB 2-Slot Plug to Blunt Cut Genderless Cable Assembly using M17/176-00002 Coax, 3 FT from L-com has same day shipment for domestic and International orders. L-com is a leading manufacturer of wired and wireless connectivity products and committed to in-stock availability and same day shipping. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

## LEAD FREE SOLDER

ZONE	REV	A
------	-----	---

## AD Drawing

LENGTH

BLUNT CUT

LABEL  
SEE NOTE 1 & 2

WWW.L-COM.COM  
LCXXXXXX-XX

M17/176-00002, 78 OHM TWINAX CABLE  
JACKET: PFA, BLUE  
NOM DIA: 129" [3.28]

TRB 2-SLOT PLUG

NOTES:

1. CABLE ASSY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS, ONE LABEL APPROX CENTERED. LONGER THAN 36 INCHES, TWO LABELS APPROX 6 INCHES FROM EACH CONNECTOR.

2. CABLE ASSEMBLY LENGTH DETERMINED BY ILLUSTRATED: LC3MSA0463-XX (XX = OAL IN INCHES)

3. CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY

 <b>L-com</b> <b>an INFINITE brand</b>		INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5	
		SCALE	SHEET
		1 OF 1	
		NONE	
		RE A	
<b>LEADING DIMENSIONS ARE IN INCHES</b> <b>DIMENSIONS IN ( ) ARE MILLIMETERS</b>			
<b>TOLERANCES:</b> $X = \pm 0.2 [5]$ $XX = \pm 0.02 [0.5]$ $XXX = \pm 0.005 [0.13]$		<b>FRACTIONS</b> $\pm 1/32$ <b>ANGLES:</b> $\pm 1^\circ$ <b>CABLE TOLERANCES:</b> $[12345] = \pm 12\%$ $[123456] = \pm 12\%$ $[1234567] = \pm 12\%$ $[12345678] = \pm 12\%$ $[123456789] = \pm 12\%$ $[1234567890] = \pm 12\%$	
		<b>DESCRIPTION</b> <b>Lead Free 2-Slot TRB Plug with Blunt Cut 1553 Cable Using 78 Ohm</b> <b>M17/17-600002 Twinax</b>	
<b>Phone:</b> 1.800.341.5226   <b>Website:</b> <a href="http://www.L-com.com">www.L-com.com</a>		<b>ITEM NO.</b> LC3M/MSA/00463 <b>DRAWN BY</b> KDANG	