

GLOBAL CONNECTIVITY SOLUTIONS

Low Loss QMA Male Right Angle to SMA Male Cable Assembly using LMR-240 Coax, 2 FT with Times Microwave Components

LCCA30261-FT2

Configuration

- Connector 1: QMA Male Right Angle
- Connector 2: SMA Male
- Cable Type: LMR-240


Features

- Using Times Microwave Components
- Max Frequency 5.8 GHz
- Shielding Effectivity > 90 dB
- 84% Phase Velocity

Applications

- · General Purpose
- · Laboratory Use
- Antenna Installations

- PE Jacket
- Low Insertion Loss
- Bend Radius of 2.5 Inches
- Land Mobile Radio & Other Communication Systems
- Cellular & Wi-Fi Systems

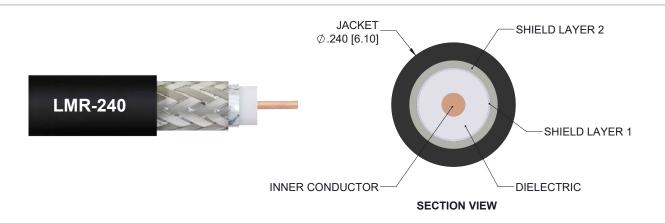

Description

L-com's LCCA30261-FT2 is a low loss QMA male right angle to SMA male cable assembly using LMR-240 coax, 2 FT with Times Microwave components and ships same-day. The LMR-240 coax of this QMA cable uses the PE (F) dielectric with a VoP of 84%, resulting in very low insertion loss compared to solid dielectrics. These flexible RF cable assemblies are ideal for applications where flexure is required. Our L-com QMA to SMA cable assembly has a male to male gender configuration with flexible LMR-240 series coax and operates to 5.8 GHz. The double shield of this QMA cable is layered by tinned copper braid over aluminum tape providing shielding effectiveness greater than 90dB. This right angle QMA cable interface on the LMR-240 coax allows for easier connections in tight spaces. *LMR[™] is a trademark of Times Microwave Systems.

Custom versions of this QMA male to QMA male cable, along with the rest of L-com's other RF assemblies, can also be built and shipped same day. Other available RF cable assembly value added services from L-com include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly. Contact a sales representative for testing or custom RF cable quotes. Part number LCCA30261-FT2 L-com Low Loss QMA Male Right Angle to SMA Male Cable Assembly using LMR-240 Coax, 2 FT with Times Microwave Components data sheet PDF includes details of the RF product specifications, CAD drawing(s) and dimensions below.





Low Loss QMA Male Right Angle to SMA Male Cable Assembly using LMR-240 Coax, 2 FT with Times Microwave Components

LCCA30261-FT2



Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		5.8	GHz
Velocity of Propagation		84		%
RF Shielding	90			dB
Group Delay		1.21 [3.97]		ns/ft [ns/m]
Capacitance		24.2 [79.4]		pF/ft [pF/m]
Inductance		0.06 [0.2]		uH/ft [uH/m]
DC Resistance Inner Cond	uctor	3.2 [10.5]		Ohms/1000ft [Ohms/Km]
DC Resistance Outer Conc	luctor	3.89 [12.76]		Ohms/1000ft [Ohms/Km]
Jacket Spark			5,000	Vrms

Specifications by Frequency

Frequency 0.25 0.5 1 2.5 5.8 GHz Insertion Loss (Typ.) 0.37 0.41 0.45 0.55 0.7 dB	Description	F1	F2	F3	F4	F5	Units
Insertion Loss (Typ.) 0.37 0.41 0.45 0.55 0.7 dB	Frequency	0.25	0.5	1	2.5	5.8	GHz
	Insertion Loss (Typ.)	0.37	0.41	0.45	0.55	0.7	dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1 dB for the straight connector and 0.2 dB for the right angle connector.

Mechanical Specifications

Cable Assembly Length	24 in [609.6 mm]
Cable Cable Type Impedance Inner Conductor Type Inner Conductor Material and Plating Dielectric Type Number of Shields Shield Layer 1 Shield Layer 2 Jacket Material Jacket Diameter	LMR-240 50 Ohms Solid Copper PE (F) 2 Aluminum Tape Tinned Copper Braid PE, Black 0.24 in [6.1 mm]



Low Loss QMA Male Right Angle to SMA Male Cable Assembly using LMR-240 Coax, 2 FT with Times Microwave Components

LCCA30261-FT2

One Time Minimum Bend Radius Repeated Minimum Bend Radius Bending Moment Flat Plate Crush Tensile Strength 0.75 in [19.05 mm] 2.5 in [63.5 mm] 0.25 lbs-ft [0.34 N-m] 20 lbs/in [0.36 Kg/mm] 80 lbs [36.29 Kg]

Connectors

Connector 1	Connector 2
QMA Male Right Angle	SMA Male
	MIL-STD-348
50 Ohms	50 Ohms
Beryllium Copper, Gold	Beryllium Copper, Gold
	ASTM B488
PTFE	Teflon
Brass, Nickel	
Brass, Nickel	Passivated Stainless Steel
	SAE-AMS-2700
	Passivated Stainless Steel
	SAE-AMS-2700
	QMA Male Right Angle 50 Ohms Beryllium Copper, Gold PTFE Brass, Nickel

Environmental Specifications

Temperature Operating Range Storage Range

-40 to +85 deg C -70 to +85 deg C

Compliance Certifications (see product page for current document)


Plotted and Other Data Notes:



Low Loss QMA Male Right Angle to SMA Male Cable Assembly using LMR-240 Coax, 2 FT with Times Microwave Components

LCCA30261-FT2

How to Order

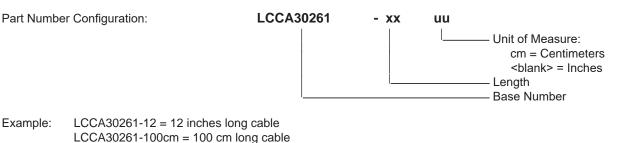

Low Loss QMA Male Right Angle to SMA Male Cable Assembly using LMR-240 Coax, 2 FT with Times Microwave Components from L-com has same day shipment for domestic and International orders. L-com is a leading manufacturer of wired and wireless connectivity products and committed to in-stock availability and same day shipping. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.ontained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make not reserve to make such changes as a curvate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

Low Loss QMA Male Right Angle to SMA Male Cable Assembly using LMR-240 Coax, 2 FT with Times Microwave Components

L-com CAD Drawing

