

Low Loss TNC Male to N Female Cable Assembly using LMR-600-DB Coax, 2 FT with Times Microwave Components with HeatShrink



LCCA30344-FT2

Configuration

- Connector 1: TNC Male
- Connector 2: N Female
- Cable Type: LMR-600-DB

Features


- Using Times Microwave Components
- Max Frequency 5.8 GHz
- Shielding Effectivity > 90 dB
- 87% Phase Velocity

- PE Jacket
- Low Insertion Loss
- Bend Radius of 6 Inches

Applications

- General Purpose
- Laboratory Use
- Antenna Installations

- Land Mobile Radio & Other Communication Systems
- Cellular & Wi-Fi Systems

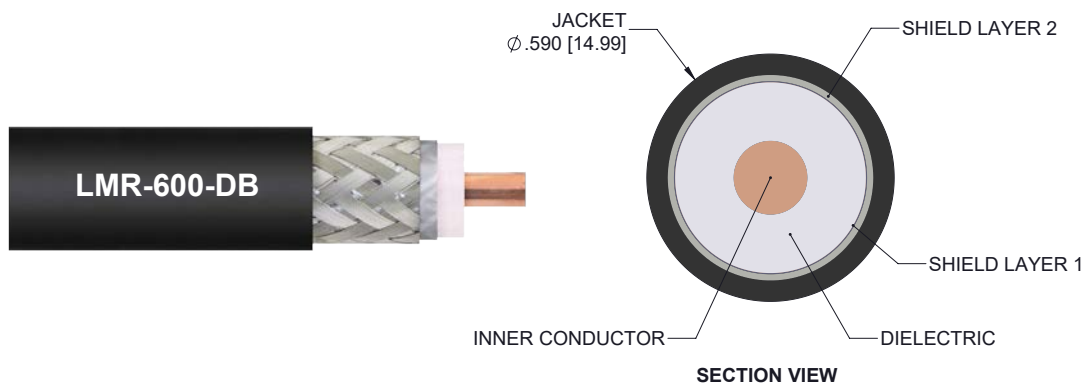

Description

L-com's LCCA30344-FT2 is a low loss TNC male to N female cable assembly using LMR-600-DB coax, 2 FT with Times Microwave components with heatshrink and ships same-day. The LMR-600-DB coax of this TNC cable uses the PE (F) dielectric with a VoP of 87%, resulting in very low insertion loss compared to solid dielectrics. These flexible RF cable assemblies are ideal for applications where flexure is required. Our L-com TNC to N cable assembly has a male to female gender configuration with flexible LMR-600-DB series coax and operates to 5.8 GHz. The double shield of this TNC cable is layered by tinned copper braid over aluminum tape providing shielding effectiveness greater than 90dB. *LMRTM is a trademark of Times Microwave Systems.

Custom versions of this TNC male to TNC female cable, along with the rest of L-com's other RF assemblies, can also be built and shipped same day. Other available RF cable assembly value added services from L-com include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly. Contact a sales representative for testing or custom RF cable quotes. Part number LCCA30344-FT2 L-com Low Loss TNC Male to N Female Cable Assembly using LMR-600-DB Coax, 2 FT with Times Microwave Components with HeatShrink data sheet PDF includes details of the RF product specifications, CAD drawing(s) and dimensions below.

Low Loss TNC Male to N Female Cable Assembly using LMR-600-DB Coax, 2 FT with Times Microwave Components with HeatShrink



LCCA30344-FT2

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|-------------------------------|---------|--------------|---------|-----------------------|
| Frequency Range | DC | | 5.8 | GHz |
| Velocity of Propagation | | 87 | | % |
| RF Shielding | 90 | | | dB |
| Group Delay | | 1.17 [3.84] | | ns/ft [ns/m] |
| Capacitance | | 23.4 [76.77] | | pF/ft [pF/m] |
| Inductance | | 0.058 [0.19] | | uH/ft [uH/m] |
| DC Resistance Inner Conductor | | 0.53 [1.74] | | Ohms/1000ft [Ohms/Km] |
| DC Resistance Outer Conductor | | 1.2 [3.94] | | Ohms/1000ft [Ohms/Km] |
| Jacket Spark | | | 8,000 | Vrms |

Specifications by Frequency

| Description | F1 | F2 | F3 | F4 | F5 | Units |
|-----------------------|------|------|------|------|------|-------|
| Frequency | 0.25 | 0.5 | 1 | 2.5 | 5.8 | GHz |
| Insertion Loss (Typ.) | 0.22 | 0.23 | 0.25 | 0.28 | 0.34 | dB |

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly.
The Insertion Loss includes an estimated insertion loss of 0.1 dB per connector

Mechanical Specifications

Cable Assembly

| | |
|----------|---------------------|
| Length | 24 in [609.6 mm] |
| Diameter | 0.87 in [22.1 mm] |
| Weight | 0.43 lbs [195.04 g] |

Cable

| | |
|--------------------------------------|----------------------|
| Cable Type | LMR-600-DB |
| Impedance | 50 Ohms |
| Inner Conductor Type | Solid |
| Inner Conductor Material and Plating | Copper Clad Aluminum |
| Dielectric Type | PE (F) |
| Number of Shields | 2 |
| Shield Layer 1 | Aluminum Tape |
| Shield Layer 2 | Tinned Copper Braid |

Low Loss TNC Male to N Female Cable Assembly using LMR-600-DB
Coax, 2 FT with Times Microwave Components with HeatShrink



LCCA30344-FT2

| | |
|------------------------------|------------------------|
| Jacket Material | PE, Black |
| Jacket Diameter | 0.59 in [14.99 mm] |
| One Time Minimum Bend Radius | 1.5 in [38.1 mm] |
| Repeated Minimum Bend Radius | 6 in [152.4 mm] |
| Bending Moment | 2.75 lbs-ft [3.73 N-m] |
| Flat Plate Crush | 60 lbs/in [1.07 Kg/mm] |
| Tensile Strength | 350 lbs [158.76 Kg] |

Connectors

| Description | Connector 1 | Connector 2 |
|--------------------------------------|------------------------|---------------------|
| Type | TNC Male | N Female |
| Impedance | 50 Ohms | 50 Ohms |
| Mating Cycles | 500 | |
| Contact Material and Plating | Beryllium Copper, Gold | Spring Bronze, Gold |
| Dielectric Type | PTFE | PTFE |
| Outer Conductor Material and Plating | | Brass, Tri-Metal |
| Body Material and Plating | Brass, Tri-Metal | Copper, Tri-Metal |
| Coupling Nut Material and Plating | Brass, Tri-Metal | |
| Hex Size | | 16 mm |

Environmental Specifications

| | |
|--------------------|------------------|
| Temperature | |
| Operating Range | -40 to +85 deg C |
| Storage Range | -70 to +85 deg C |

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Low Loss TNC Male to N Female Cable Assembly using LMR-600-DB Coax, 2 FT with Times Microwave Components with HeatShrink



LCCA30344-FT2

How to Order

Part Number Configuration:

LCCA30344

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: LCCA30344-12 = 12 inches long cable
LCCA30344-100cm = 100 cm long cable

Low Loss TNC Male to N Female Cable Assembly using LMR-600-DB Coax, 2 FT with Times Microwave Components with HeatShrink from L-com has same day shipment for domestic and International orders. L-com is a leading manufacturer of wired and wireless connectivity products and committed to in-stock availability and same day shipping. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

Low Loss TNC Male to N Female Cable Assembly using LMR-600-DB Coax,
2 FT with Times Microwave Components with HeatShrink

L-com CAD Drawing

