

GLOBAL CONNECTIVITY SOLUTIONS

Low Loss 4.3-10 Male to N Male Cable Assembly using LMR-600-DB Coax, 6 FT with Times Microwave Components

LCCA30350-FT6

Configuration

- Connector 1: 4.3-10 Male
- Connector 2: N Male
- Cable Type: LMR-600-DB


Features

- Using Times Microwave Components
- Max Frequency 5.8 GHz
- Shielding Effectivity > 90 dB
- 87% Phase Velocity

Applications

- General Purpose
- · Laboratory Use
- Antenna Installations

- PE Jacket
- Low Insertion Loss
- · Bend Radius of 6 Inches
- Land Mobile Radio & Other Communication Systems
- Cellular & Wi-Fi Systems

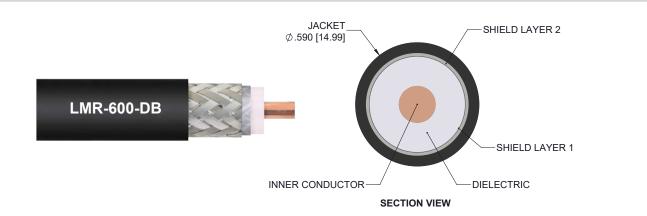

Description

L-com's LCCA30350-FT6 is a low loss 4.3-10 male to N male cable assembly using LMR-600-DB coax, 6 FT with Times Microwave components and ships same-day. The LMR-600-DB coax of this 4.3-10 cable uses the PE (F) dielectric with a VoP of 87%, resulting in very low insertion loss compared to solid dielectrics. These flexible RF cable assemblies are ideal for applications where flexure is required. Our L-com 4.3-10 to N cable assembly has a male to male gender configuration with flexible LMR-600-DB series coax and operates to 5.8 GHz. The double shield of this 4.3-10 cable is layered by tinned copper braid over aluminum tape providing shielding effectiveness greater than 90dB. *LMR™ is a trademark of Times Microwave Systems.

Custom versions of this 4.3-10 male to 4.3-10 male cable, along with the rest of L-com's other RF assemblies, can also be built and shipped same day. Other available RF cable assembly value added services from L-com include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly. Contact a sales representative for testing or custom RF cable quotes. Part number LCCA30350-FT6 L-com Low Loss 4.3-10 Male to N Male Cable Assembly using LMR-600-DB Coax, 6 FT with Times Microwave Components data sheet PDF includes details of the RF product specifications, CAD drawing(s) and dimensions below.



Low Loss 4.3-10 Male to N Male Cable Assembly using LMR-600-DB Coax, 6 FT with Times Microwave Components

LCCA30350-FT6

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		5.8	GHz
VSWR			1.4:1	
Velocity of Propagation		87		%
RF Shielding	90			dB
Group Delay		1.17 [3.84]		ns/ft [ns/m]
Capacitance		23.4 [76.77]		pF/ft [pF/m]
Inductance		0.058 [0.19]		uH/ft [uH/m]
DC Resistance Inner Cond	uctor	0.53 [1.74]		Ohms/1000ft [Ohms/Km]
DC Resistance Outer Conc	luctor	1.2 [3.94]		Ohms/1000ft [Ohms/Km]
Jacket Spark			8,000	Vrms

Specifications by Frequency

Frequency 0.25 0.5 1 2.5 5.8 GHz Insertion Loss (Typ.) 0.27 0.31 0.36 0.46 0.64 dB	Description	F1	F2	F3	F4	F5	Units	
Insertion Loss (Typ.) 0.27 0.31 0.36 0.46 0.64 dB	Frequency	0.25	0.5	1	2.5	5.8	GHz	
	Insertion Loss (Typ.)	0.27	0.31	0.36	0.46	0.64	dB	

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1 dB per connector.

Mechanical Specifications

Cable Assembly Length	72 in [182.88 cm
Cable Cable Type Impedance Inner Conductor Type Inner Conductor Material and Plating Dielectric Type Number of Shields Shield Layer 1	LMR-600-DB 50 Ohms Solid Copper Clad Alu PE (F) 2 Aluminum Tape
Shield Layer 2	Tinned Copper B

n]

uminum Inned Copper Braid



GLOBAL CONNECTIVITY SOLUTIONS

Low Loss 4.3-10 Male to N Male Cable Assembly using LMR-600-DB Coax, 6 FT with Times Microwave Components

LCCA30350-FT6

Jacket Material Jacket Diameter

One Time Minimum Bend Radius Repeated Minimum Bend Radius Bending Moment Flat Plate Crush Tensile Strength PE, Black 0.59 in [14.99 mm]

1.5 in [38.1 mm] 6 in [152.4 mm] 2.75 lbs-ft [3.73 N-m] 60 lbs/in [1.07 Kg/mm] 350 lbs [158.76 Kg]

Connectors

Description	Connector 1	Connector 2
Туре	4.3-10 Male	N Male
Impedance	50 Ohms	50 Ohms
Mating Cycles	500	
Contact Material and Plating	Brass, Silver	Brass, Gold
Contact Plating Specification		50μ in. minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Body Plating Specification		100µ in. minimum
Coupling Nut Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Coupling Nut Plating Specification		100µ in. minimum
Hex Size		20.57 mm
Torque		44 in-Ibs 4.97 Nm

Environmental Specifications

Temperature Operating Range Storage Range

-40 to +85 deg C -70 to +85 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:





Low Loss 4.3-10 Male to N Male Cable Assembly using LMR-600-DB Coax, 6 FT with Times Microwave Components

LCCA30350-FT6


How to Order

Example:

Part Number Configuration: LCCA30350 - XX uu Unit of Measure: cm = Centimeters <blank> = Inches Length Base Number LCCA30350-12 = 12 inches long cable LCCA30350-100cm = 100 cm long cable

Low Loss 4.3-10 Male to N Male Cable Assembly using LMR-600-DB Coax, 6 FT with Times Microwave Components from L-com has same day shipment for domestic and International orders. L-com is a leading manufacturer of wired and wireless connectivity products and committed to in-stock availability and same day shipping. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.ontained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.



Low Loss 4.3-10 Male to N Male Cable Assembly using LMR-600-DB Coax, 6 FT with Times Microwave Components

L-com CAD Drawing

