

2 Watt RF Load Up to 12 GHz with 75 Ohm BNC Male Tri-Metal over Copper Plated Brass



LCTR1190

Features

- DC to 12 GHz Frequency Range
- 75 Ohm Impedance
- BNC Male Coaxial Interface
- Max VSWR 1.25:1
- Max Power 2 Watts (CW)

Applications

- 8k UHD TV
- Video Distribution
- Test and Measurement

Description

L-com's LCTR1190 is an RF termination (also called RF load or dummy load) that operates from DC to 12 GHz and handles up to 2 Watt (CW). Our BNC termination / load has a male gender. LCTR1190 BNC load termination offers 1.25:1 max VSWR. RF load / terminations are indispensable components in many RF, microwave and millimeter wave systems where signal reflection from unused ports can potentially damage the device or reduce the signal integrity. By using a terminator on an unused port with a matched load (dummy load), the incident energy will be absorbed with minimal reflection. These termination components are commonly used to terminate devices such as couplers, circulators, and switches. They are also widely used in measurement systems to ensure accurate results. L-com offers a huge selection of RF, microwave and millimeter wave terminations up to 65 GHz with excellent performance over the entire operating range and power handling capabilities up to 800 Watt (CW).

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		12	GHz
Impedance		75		Ohms
VSWR, Input			1.25:1	
Input Power (CW)			2	Watts
2W average power from -55°C to +70°C linearly derated to 1W at 165°C				
Dielectric Withstanding Voltage (AC)			1,500	Vrms
Operating Voltage (AC)			500	Vrms

Mechanical Specifications

Size

Length	1.26 in [32 mm]
Width	0.62 in [15.75 mm]
Height	0.62 in [15.75 mm]
Weight	0.2 lbs [90.72 g]

Configuration

Connector	BNC Male
Mating Torque	0.6 to 2.5 in-lbs [0.07 to 0.28 Nm]
Durability	500 Cycles

2 Watt RF Load Up to 12 GHz with 75 Ohm BNC
Male Tri-Metal over Copper Plated Brass



LCTR1190

Material Specifications

Description	Material	Plating
Connector 1 Contact	Beryllium Copper	Gold over Nickel-Phosphorus Alloy over Copper
Insulation	Teflon	
Gasket	Silicone	
Connector 1 Body	Brass	Tri-Metal over Copper
Coupling Nut	Brass	Tri-Metal over Copper
Housing	Brass	Tri-Metal over Copper

Environmental Specifications

Temperature

Operating Range

-55 to +165 deg C

Humidity

Mil-STD-202, Method 106

Thermal Shock

MIL-STD-202, Method 107, Condition B

Salt Spray

MIL-STD-202, Method 101, Condition B

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:


2 Watt RF Load Up to 12 GHz with 75 Ohm BNC Male Tri-Metal over Copper Plated Brass from L-com has same day shipment for domestic and International orders. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

URL: <https://www.l-com.com/2-watt-rf-load-up-12-ghz-75-ohm-bnc-male-tri-metal-over-copper-plated-brass-lctr1190-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

LCTR1190 CAD Drawing

2 Watt RF Load Up to 12 GHz with 75 Ohm BNC Male Tri-Metal over Copper Plated Brass

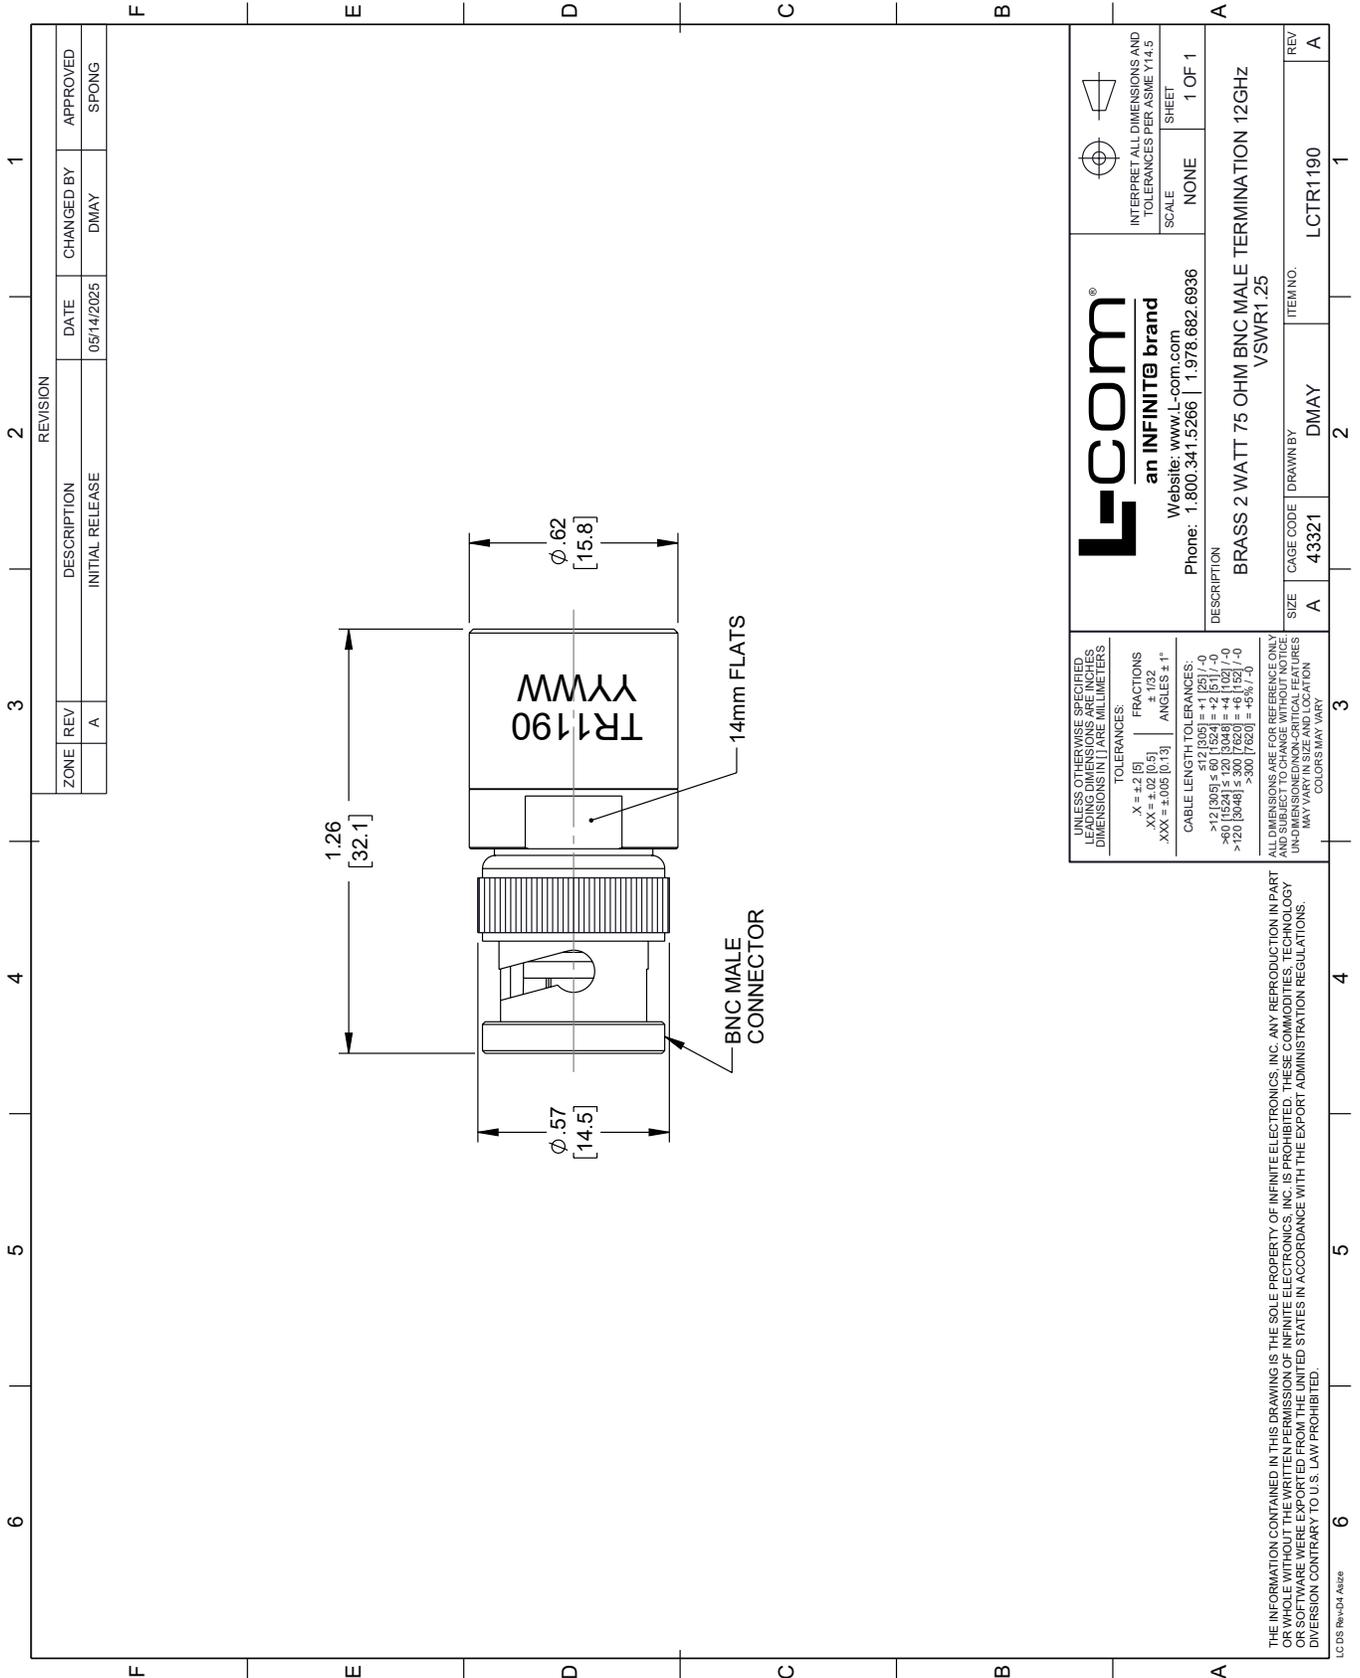

REVISION		DATE	CHANGED BY	APPROVED	
ZONE	REV	DESCRIPTION	INITIAL RELEASE	DMAY	SPONG
	A				

L-com
an INFINITE brand
Website: www.L-com.com
Phone: 1.800.341.5266 | 1.978.682.6936

INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5
SCALE: NONE
SHEET: 1 OF 1

UNLESS OTHERWISE SPECIFIED, LEADING DIMENSIONS ARE IN INCHES AND DIMENSIONS IN [] ARE MILLIMETERS.
TOLERANCES:
.X = ±.2 [5] FRACTIONS ± 1/32
.XX = ±.02 [0.5] ANGLES ± 1°
.XXX = ±.005 [0.13]

CABLE LENGTH TOLERANCES:
≤ 12 [305] ±.60 [15.24] = ±.2 [5.1] / -0
> 12 [305] ≤ 60 [1524] ±.12 [3.048] = ±.4 [10.2] / -0
> 60 [1524] ≤ 120 [3048] ±.24 [6.096] = ±.8 [20.32] / -0
> 120 [3048] ±.300 [7.620] = ±.6 [15.24] / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY. UNDIMENSIONED/NON-CRITICAL FEATURES MAY VARY IN SIZE AND LOCATION. COLORS MAY VARY.

DESCRIPTION: BRASS 2 WATT 75 OHM BNC MALE TERMINATION 12GHZ VSWR1.25

SIZE	CAGE CODE	DRAWN BY	ITEM NO.
A	43321	DMAY	LCTR1190

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SERVICES ARE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

LC 05 Rev-D4 Atsize