

GLOBAL CONNECTIVITY SOLUTIONS

N Male to N Female Cable Using 402SS Series Coax with Heavy Duty Boot, 2.0 ft

LCCA30008-FT2

Configuration

- Connector 1: N Male
- Connector 2: N Female
- · Cable Type: 402SS Series

Features


- Max Frequency 18 GHz
- Shielding Effectivity > 110dB
- 70% Phase Velocity
- Double Shielded
- FEP Jacket

Applications

- · General Purpose
- · Laboratory Use

- · Wire Braid over Spiral Strip Shield
- Flexible Alternative to .141 Semi-Rigid
- · Heavy Duty Heat Shrink Strain Relief Boot
- Precision Stainless Steel Connectors
- Flexible RF Interconnect
- Automated (ATE) Test Systems





Description

1

L-com's LCCA30008-FT2 is a N male to N female cable using 402SS series coax with heavy duty boot, 2.0 ft and ships same-day. The 402SS series coax of this N cable uses the PTFE dielectric with a VoP of 70%. These flexible RF cable assemblies are ideal for applications where flexure is required. Our L-com N to N cable assembly has a male to female gender configuration with flexible 402SS series coax and operates to 11 GHz. The double shield of this N cable is layered by silver plated copper braid over silver plated copper tape providing excellent shielding effectiveness greater than 110dB. L-com's Cable Assembly LCCA30008 is an N male to N female, 2.0 ft cable using 402SS Series coax with Heavy Duty Boot that ships same-day. L-com's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This L-com N to N cable assembly has a male to female gender configuration with 50 ohm flexible 402SS Series coax and operates to 18 GHz. Highly durable stainless-steel connectors and heavy-duty booting excellent shielding effectiveness greater than 110dB.

Custom versions of this cable assembly along with the rest of L-com's RF cable assemblies can be built and shipped same day. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly. Contact a sales representative for custom cable quotes.

Custom versions of this N male to N female cable, along with the rest of L-com's other RF assemblies, can also be built and shipped same day. Other





N Male to N Female Cable Using 402SS Series Coax with Heavy Duty Boot, 2.0 ft



LCCA30008-FT2

available RF cable assembly value added services from L-com include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly. Contact a sales representative for testing or custom RF cable quotes. Part number LCCA30008-FT2 L-com N Male to N Female Cable Using 402SS Series Coax with Heavy Duty Boot, 2.0 ft data sheet PDF includes details of the RF product specifications, CAD drawing(s) and dimensions below.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		11	GHz
VSWR			1.4:1	
Velocity of Propagation		70		%
RF Shielding	110			dB
Capacitance		29.4 [96.46]		pF/ft [pF/m]
Operating Voltage (AC)			500	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	3	5	10			GHz
Insertion Loss (Max.)	0.66	0.8	1.1			dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly. The Insertion Loss is estimated as 0.1*SQRT(FGHz) dB per connector.

Mechanical Specifications

Cable Assembly Length Diameter	24 in [609.6 mm] 0.315 in [8 mm]
Weight	0.26 lbs [117.93 g]
Cable	
Cable Type	402SS Series
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper, Silver
Dielectric Type	PTFE
Number of Shields	2
Shield Layer 1	Silver Plated Copper Tape
Shield Layer 2	Silver Plated Copper Braid



GLOBAL CONNECTIVITY SOLUTIONS

N Male to N Female Cable Using 402SS Series Coax with Heavy Duty Boot, 2.0 ft

LCCA30008-FT2

Jacket Material Jacket Diameter FEP, Blue 0.163 in [4.14 mm]

Repeated Minimum Bend Radius

1 in [25.4 mm]

Connectors

Description	Connector 1	Connector 2
Туре	N Male	N Female
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	50 µin minimum	50 µin minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 µin minimum	100 µin minimum
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification	100 µin minimum	100 µin minimum
Boot Material	Heavy Duty Heat Shrink Boot	Heavy Duty Heat Shrink Boot

Environmental Specifications

Temperature Operating Range

-55 to +165 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Values at 25°C, sea level.

3






N Male to N Female Cable Using 402SS Series Coax with Heavy Duty Boot, 2.0 ft

LCCA30008-FT2

How to Order

Part Number Configuration:




Example: LCCA30008-12 = 12 inches long cable LCCA30008-100cm = 100 cm long cable

N Male to N Female Cable Using 402SS Series Coax with Heavy Duty Boot, 2.0 ft from L-com has same day shipment for domestic and International orders. L-com is a leading manufacturer of wired and wireless connectivity products and committed to in-stock availability and same day shipping. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.ontained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not marke any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

L-com CAD Drawing

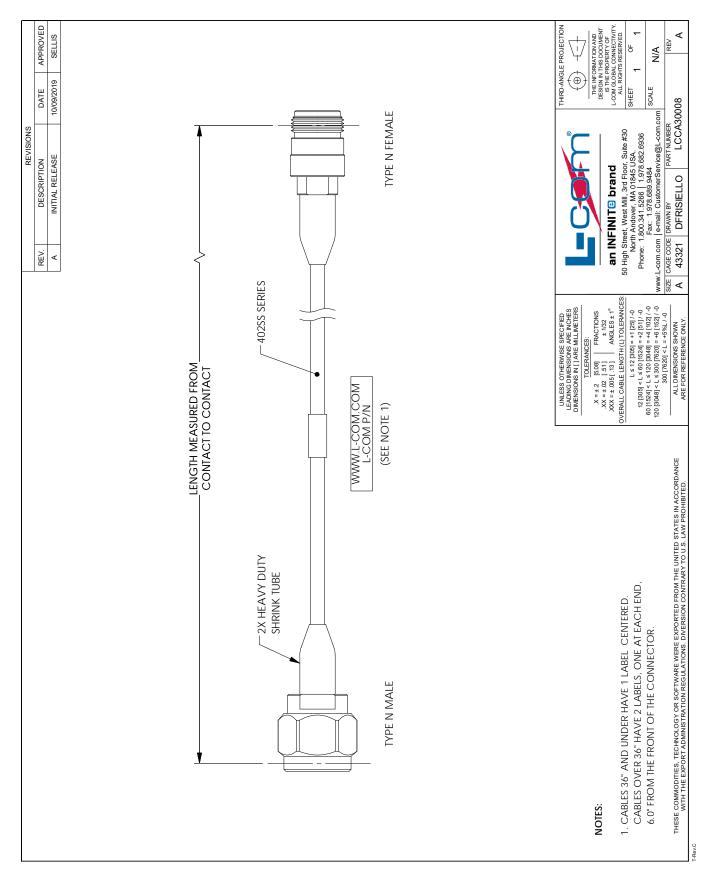

LCCA30008-FT2 REV 1.1 | © 2020 Infinite Electronics, Inc. L-com is a registered trademark of Infinite Electronics, Inc.