

## **GLOBAL CONNECTIVITY SOLUTIONS**

Low Loss TNC Male to N Male Right Angle Cable Assembly with Heavy Duty Heat Shrink Boot using LL142 Coax, 5 FT

## LCCA30029-FT5

## Configuration

- Connector 1: TNC Male
- Connector 2: N Male Right Angle
- · Cable Type: LL142


#### **Features**

- Max Frequency 18 GHz
- Shielding Effectivity > 95dB
- Low Loss Expanded PTFE Dielectric with 80% VoP

#### **Applications**

- General Purpose
- Laboratory Use
- Flexible RF Interconnect

- FEP Jacket
- Triple Shielded
- · Heavy Duty Heat Shrink Strain Relief Boot
- Automated (ATE) Test Systems
- Antenna Range Applications and Long Cable Runs

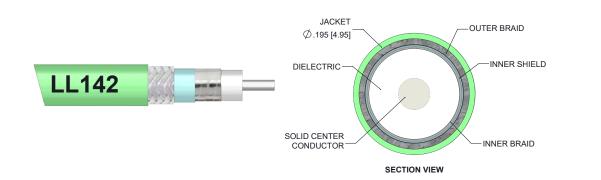

## Description

L-com's LCCA30029-FT5 is a low loss TNC male to N male right angle cable assembly with heavy duty heat shrink boot using LL142 coax, 5 FT and ships same-day. The LL142 coax of this TNC cable uses the tape wrapped PTFE dielectric with a VoP of 80%, resulting in very low insertion loss compared to solid dielectrics. These flexible RF cable assemblies are ideal for applications where flexure is required. Our L-com TNC to N cable assembly has a male to male gender configuration with flexible LL142 series coax and operates to 18 GHz. The triple shield of this TNC cable is layered by silver plated copper braid over silver plated copper tape providing excellent shielding effectiveness greater than 95dB. This right angle N cable interface on the LL142 coax allows for easier connections in tight spaces. Highly durable stainless-steel connectors and heavy-duty booting extend the life of these versatile, flexible TNC to N cables.

Custom versions of this TNC male to TNC male cable, along with the rest of L-com's other RF assemblies, can also be built and shipped same day. Other available RF cable assembly value added services from L-com include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly. Contact a sales representative for testing or custom RF cable quotes. Part number LCCA30029-FT5 L-com Low Loss TNC Male to N Male Right Angle Cable Assembly with Heavy Duty Heat Shrink Boot using LL142 Coax, 5 FT data sheet PDF includes details of the RF product specifications, CAD drawing(s) and dimensions below.



and the second s

Low Loss TNC Male to N Male Right Angle Cable Assembly with Heavy Duty Heat Shrink Boot using LL142 Coax, 5 FT

## LCCA30029-FT5



Description	Minimum		Typical		Maximum	Units
Frequency Range	DC				18	GHz
VSWR					1.35:1	
Velocity of Propagation			80			%
RF Shielding	95					dB
Capacitance			25 [82.02]			pF/ft [pF/m]
Specifications by F	Frequency					
Description	F1	F2	F3	F4	F5	Units

4.5

1.21

9

1.65

18

2.32

GHz

dB

Electrical Specification Notes:

1

0.7

Frequency

Insertion Loss (Max.)

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly. The Insertion Loss is estimated as 0.05\*SQRT(FGHz) dB per TNC male connector and as 0.2 dB per N male right angle connector.

## **Mechanical Specifications**

Cable Assembly Length Diameter	60 in [152.4 cm] 0.195 in [4.95 mm]
Weight Cable	0.187 lbs [84.82 g]
Cable Type Impedance Inner Conductor Type Inner Conductor Material and Plating Dielectric Type	LL142 50 Ohms Solid Copper, Silver Tape wrapped PTFE
Number of Shields Shield Layer 1 Shield Layer 2 Shield Layer 3 Jacket Material Jacket Diameter	3 Silver Plated Copper Tape Aluminum Polyester Silver Plated Copper Braid FEP, Green 0.195 in [4.95 mm]
Repeated Minimum Bend Radius	0.975 in [24.77 mm]

2

0.88

LCCA30029-FT5 REV 1.0 | © 2019 Infinite Electronics, Inc. L-com is a registered trademark of Infinite Electronics, Inc.



Low Loss TNC Male to N Male Right Angle Cable Assembly with Heavy Duty Heat Shrink Boot using LL142 Coax, 5 FT

## LCCA30029-FT5



## Connectors

Description	Connector 1	Connector 2	
Туре	TNC Male	N Male Right Angle	
Specification	MIL-STD-348		
Impedance	50 Ohms	50 Ohms	
Contact Material and Plating	Beryllium Copper, Gold over Nickel	Beryllium Copper, Gold over Nickel	
Contact Plating Specification	50 µin minimum	50 µin minimum	
Dielectric Type	PEI	PTFE	
Body Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel	
Body Plating Specification	SAE-AMS-2700	SAE-AMS-2700	
Coupling Nut Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel	
Coupling Nut Plating Specification	SAE-AMS-2700	SAE-AMS-2700	
Hex Size	9/16 inch	3/4 inch	
Torque	15 in-lbs 1.7 Nm	15 in-lbs 1.7 Nm	
Boot Material	Heavy Duty Heat Shrink Boot	Heavy Duty Heat Shrink Boot	

## **Environmental Specifications**

Temperature Operating Range

-55 to +200 deg C

Compliance Certifications (see product page for current document)

## **Plotted and Other Data**

- Notes:
- Values at 25°C, sea level.



Low Loss TNC Male to N Male Right Angle Cable Assembly with Heavy Duty Heat Shrink Boot using LL142 Coax, 5 FT

## LCCA30029-FT5

#### How to Order

Example:

Part Number Configuration: LCCA30029 - XX uu Unit of Measure: cm = Centimeters <blank> = Inches Length **Base Number** LCCA30029-12 = 12 inches long cable LCCA30029-100cm = 100 cm long cable

Low Loss TNC Male to N Male Right Angle Cable Assembly with Heavy Duty Heat Shrink Boot using LL142 Coax, 5 FT from L-com has same day shipment for domestic and International orders. L-com is a leading manufacturer of wired and wireless connectivity products and committed to in-stock availability and same day shipping. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.ontained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

# Low Loss TNC Male to N Male Right Angle Cable Assembly with Heavy Duty Heat Shrink Boot using LL142 Coax, 5 FT

## L-com CAD Drawing

