

Low Loss SMA Male Right Angle to SMA Male Right Angle Cable Assembly with Heavy Duty Heat Shrink Boot using LL142 Coax, 1.5 FT



LCCA30031-FT1.5

Configuration

- Connector 1: SMA Male Right Angle
- Connector 2: SMA Male Right Angle
- Cable Type: LL142

Features


- Max Frequency 18 GHz
- Shielding Effectivity > 95dB
- Low Loss Expanded PTFE Dielectric with 80% VoP

- FEP Jacket
- Triple Shielded
- Heavy Duty Heat Shrink Strain Relief Boot

Applications

- General Purpose
- Laboratory Use
- Flexible RF Interconnect

- Automated (ATE) Test Systems
- Antenna Range Applications and Long Cable Runs

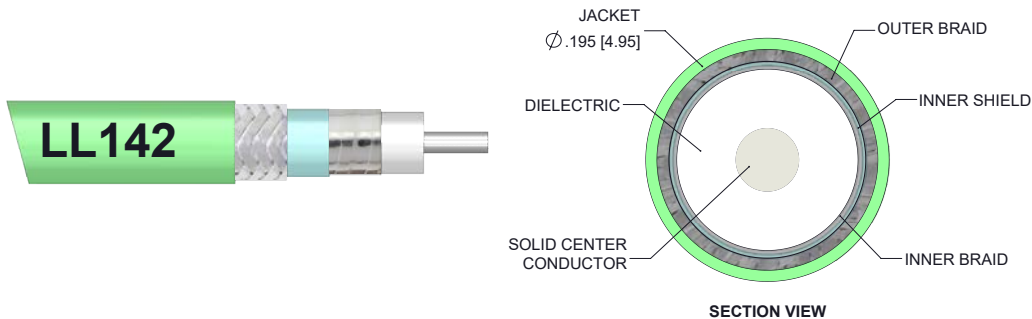

Description

L-com's LCCA30031-FT1.5 is a low loss SMA male right angle to SMA male right angle cable assembly with heavy duty heat shrink boot using LL142 coax, 1.5 FT and ships same-day. The LL142 coax of this SMA cable uses the tape wrapped PTFE dielectric with a VoP of 80%, resulting in very low insertion loss compared to solid dielectrics. These flexible RF cable assemblies are ideal for applications where flexure is required. Our L-com SMA to SMA cable assembly has a male to male gender configuration with flexible LL142 series coax and operates to 18 GHz. The triple shield of this SMA cable is layered by silver plated copper braid over silver plated copper tape providing excellent shielding effectiveness greater than 95dB. This right angle SMA cable interface on the LL142 coax allows for easier connections in tight spaces. Highly durable stainless-steel connectors and heavy-duty booting extend the life of these versatile, flexible SMA to SMA cables.

Custom versions of this SMA male to SMA male cable, along with the rest of L-com's other RF assemblies, can also be built and shipped same day. Other available RF cable assembly value added services from L-com include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly. Contact a sales representative for testing or custom RF cable quotes. Part number LCCA30031-FT1.5 L-com Low Loss SMA Male Right Angle to SMA Male Right Angle Cable Assembly with Heavy Duty Heat Shrink Boot using LL142 Coax, 1.5 FT data sheet PDF includes details of the RF product specifications, CAD drawing(s) and dimensions below.

Low Loss SMA Male Right Angle to SMA Male Right Angle Cable Assembly with Heavy Duty Heat Shrink Boot using LL142 Coax, 1.5 FT



LCCA30031-FT1.5

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz
VSWR			1.35:1	
Velocity of Propagation		80		%
RF Shielding	95			dB
Capacitance		25 [82.02]		pF/ft [pF/m]

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	1	2	4.5	9	18	GHz
Insertion Loss (Max.)	0.54	0.58	0.67	0.79	0.97	dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly. The Insertion Loss is estimated as 0.2 dB per SMA male right angle connector.

Mechanical Specifications

Cable Assembly

Length	18 in [457.2 mm]
Diameter	0.195 in [4.95 mm]
Weight	0.067 lbs [30.39 g]

Cable

Cable Type	LL142
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper, Silver
Dielectric Type	Tape wrapped PTFE
Number of Shields	3
Shield Layer 1	Silver Plated Copper Tape
Shield Layer 2	Aluminum Polyester
Shield Layer 3	Silver Plated Copper Braid
Jacket Material	FEP, Green
Jacket Diameter	0.195 in [4.95 mm]
Repeated Minimum Bend Radius	0.975 in [24.77 mm]

Low Loss SMA Male Right Angle to SMA Male Right Angle Cable Assembly with Heavy Duty Heat Shrink Boot using LL142 Coax, 1.5 FT



LCCA30031-FT1.5

Connectors

Description	Connector 1	Connector 2
Type	SMA Male Right Angle	SMA Male Right Angle
Specification	MIL-PRF-39012	MIL-PRF-39012
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Beryllium Copper, Gold over Nickel	Beryllium Copper, Gold over Nickel
Contact Plating Specification	50 µin minimum	50 µin minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel
Body Plating Specification	SAE-AMS-2700	SAE-AMS-2700
Coupling Nut Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel
Coupling Nut Plating Specification	SAE-AMS-2700	SAE-AMS-2700
Hex Size	5/16 inch	5/16 inch
Torque	8 in-lbs 0.9 Nm	8 in-lbs 0.9 Nm
Boot Material	Heavy Duty Heat Shrink Boot	Heavy Duty Heat Shrink Boot

Environmental Specifications

Temperature

Operating Range -55 to +200 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

Low Loss SMA Male Right Angle to SMA Male Right Angle Cable Assembly with Heavy Duty Heat Shrink Boot using LL142 Coax, 1.5 FT




LCCA30031-FT1.5

How to Order

Part Number Configuration:

LCCA30031 - xx uu

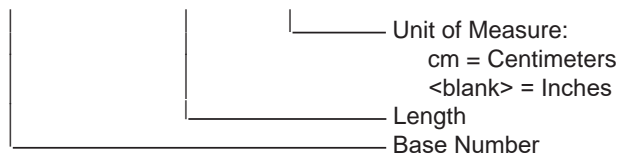

Example: LCCA30031-12 = 12 inches long cable
LCCA30031-100cm = 100 cm long cable

Low Loss SMA Male Right Angle to SMA Male Right Angle Cable Assembly with Heavy Duty Heat Shrink Boot using LL142 Coax, 1.5 FT from L-com has same day shipment for domestic and International orders. L-com is a leading manufacturer of wired and wireless connectivity products and committed to in-stock availability and same day shipping. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.ontained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

Low Loss SMA Male Right Angle to SMA Male Right Angle Cable Assembly with Heavy Duty Heat Shrink Boot using LL142 Coax, 1.5 FT

L-com CAD Drawing

REVISIONS		
REV.	DESCRIPTION	DATE
A	INITIAL RELEASE	12/20/19
	APPROVED	SELLIS

WWW.L-COM.COM
L-COM P/N

SEE NOTE 1

<p>UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS</p> <p>TOLERANCES:</p> <table style="width: 100%; border: none;"> <tr> <td style="border: none;">.X ± .2 [.08]</td> <td style="border: none;">FRACTIONS ± 1/32</td> </tr> <tr> <td style="border: none;">.XX ± .02 [.51]</td> <td style="border: none;">ANGLES ± 1°</td> </tr> <tr> <td style="border: none;">.XXX ± .005 [.13]</td> <td style="border: none;">CABLE LENGTH (L) TOLERANCES:</td> </tr> <tr> <td style="border: none;">L ≤ 12 [305] = +1 [25] / -0</td> <td style="border: none;">12 [305] < L ≤ 60 [1524] = +2 [51] / -0</td> </tr> <tr> <td style="border: none;">60 [1524] < L ≤ 120 [3048] = +4 [102] / -0</td> <td style="border: none;">120 [3048] < L ≤ 300 [7620] = +6 [152] / -0</td> </tr> <tr> <td style="border: none;">300 [7620] < L = +5%L / -0</td> <td style="border: none;"></td> </tr> </table> <p>ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.</p>	.X ± .2 [.08]	FRACTIONS ± 1/32	.XX ± .02 [.51]	ANGLES ± 1°	.XXX ± .005 [.13]	CABLE LENGTH (L) TOLERANCES:	L ≤ 12 [305] = +1 [25] / -0	12 [305] < L ≤ 60 [1524] = +2 [51] / -0	60 [1524] < L ≤ 120 [3048] = +4 [102] / -0	120 [3048] < L ≤ 300 [7620] = +6 [152] / -0	300 [7620] < L = +5%L / -0		<p style="text-align: center;">L-com™ an INFINITE brand</p> <p>50 High Street, West Mill, 3rd Floor, Suite #30 North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936 Fax: 1.978.689.9484 Website: www.l-com.com E-mail: CustomerService@l-com.com</p> <p style="text-align: center;">THIRD-ANGLE PROJECTION</p> <p style="text-align: center;">THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF L-COM GLOBAL CONNECTIVITY. ALL RIGHTS RESERVED.</p> <table style="width: 100%; border: none;"> <tr> <td style="border: none;">SHEET 1</td> <td style="border: none;">OF 1</td> </tr> <tr> <td style="border: none;">SCALE N/A</td> <td style="border: none;"></td> </tr> </table> <table style="width: 100%; border: none;"> <tr> <td style="border: none;">SIZE A</td> <td style="border: none;">CAGE CODE 43321</td> <td style="border: none;">DRAWN BY DZINN</td> <td style="border: none;">PART NUMBER LCCA30031</td> <td style="border: none;">REV A</td> </tr> </table>	SHEET 1	OF 1	SCALE N/A		SIZE A	CAGE CODE 43321	DRAWN BY DZINN	PART NUMBER LCCA30031	REV A
.X ± .2 [.08]	FRACTIONS ± 1/32																					
.XX ± .02 [.51]	ANGLES ± 1°																					
.XXX ± .005 [.13]	CABLE LENGTH (L) TOLERANCES:																					
L ≤ 12 [305] = +1 [25] / -0	12 [305] < L ≤ 60 [1524] = +2 [51] / -0																					
60 [1524] < L ≤ 120 [3048] = +4 [102] / -0	120 [3048] < L ≤ 300 [7620] = +6 [152] / -0																					
300 [7620] < L = +5%L / -0																						
SHEET 1	OF 1																					
SCALE N/A																						
SIZE A	CAGE CODE 43321	DRAWN BY DZINN	PART NUMBER LCCA30031	REV A																		

NOTES:

- CABLES 36" AND UNDER HAVE 1 LABEL CENTERED.
CABLES OVER 36" HAVE 2 LABELS, ONE AT EACH END, 6.0" FROM THE FRONT OF THE CONNECTOR.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

T-Rev D