

GLOBAL CONNECTIVITY SOLUTIONS

Low Loss TNC Male to TNC Male Cable Assembly using LMR-200 Coax, 5 FT with Times Microwave Components

LCCA30163-FT5

Configuration

- Connector 1: TNC Male
- Connector 2: TNC Male
- Cable Type: LMR-200


Features

- Using Times Microwave Components
- Max Frequency 5.8 GHz
- Shielding Effectivity > 90 dB
- 83% Phase Velocity

Applications

- · General Purpose
- · Laboratory Use
- Antenna Installations

- PE Jacket
- Low Insertion Loss
- Bend Radius of 2 Inches
- Land Mobile Radio & Other Communication Systems
- Cellular & Wi-Fi Systems

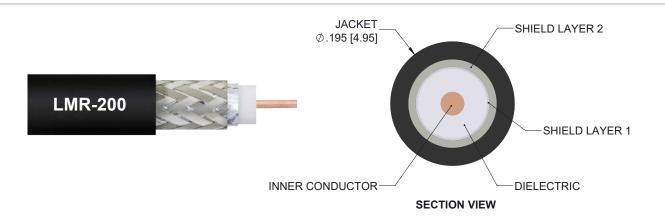

Description

L-com's LCCA30163-FT5 is a low loss TNC male to TNC male cable assembly using LMR-200 coax, 5 FT with Times Microwave components and ships same-day. The LMR-200 coax of this TNC cable uses the PE (F) dielectric with a VoP of 83%, resulting in very low insertion loss compared to solid dielectrics. These flexible RF cable assemblies are ideal for applications where flexure is required. Our L-com TNC to TNC cable assembly has a male to male gender configuration with flexible LMR-200 series coax and operates to 5.8 GHz. The double shield of this TNC cable is layered by tinned copper braid over aluminum tape providing shielding effectiveness greater than 90dB. *LMR™ is a trademark of Times Microwave Systems.

Custom versions of this TNC male to TNC male cable, along with the rest of L-com's other RF assemblies, can also be built and shipped same day. Other available RF cable assembly value added services from L-com include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly. Contact a sales representative for testing or custom RF cable quotes. Part number LCCA30163-FT5 L-com Low Loss TNC Male to TNC Male Cable Assembly using LMR-200 Coax, 5 FT with Times Microwave Components data sheet PDF includes details of the RF product specifications, CAD drawing(s) and dimensions below.



Low Loss TNC Male to TNC Male Cable Assembly using LMR-200 Coax, 5 FT with Times Microwave Components



LCCA30163-FT5

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|---------------------------|---------|--------------|---------|-----------------------|
| Frequency Range | DC | | 5.8 | GHz |
| Velocity of Propagation | | 83 | | % |
| RF Shielding | 90 | | | dB |
| Group Delay | | 1.22 [4] | | ns/ft [ns/m] |
| Capacitance | | 24.5 [80.38] | | pF/ft [pF/m] |
| Inductance | | 0.061 [0.2] | | uH/ft [uH/m] |
| DC Resistance Inner Condu | ıctor | 5.36 [17.59] | | Ohms/1000ft [Ohms/Km] |
| DC Resistance Outer Cond | uctor | 4.9 [16.08] | | Ohms/1000ft [Ohms/Km] |
| Jacket Spark | | | 3,000 | Vrms |

Specifications by Frequency

| Description | F1 | F2 | F3 | F4 | F5 | Units | |
|-----------------------|------|------|------|------|------|-------|--|
| Frequency | 0.25 | 0.5 | 1 | 2.5 | 5.8 | GHz | |
| Insertion Loss (Typ.) | 0.45 | 0.56 | 0.72 | 1.04 | 1.51 | dB | |

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1 dB per connector.

Mechanical Specifications

| Cable Assembly Length Diameter | 60 in [152.4 cm] 0.69 in [17.53 mm] |
|---|--|
| Cable Cable Type Impedance Inner Conductor Type Inner Conductor Material and Plating Dielectric Type Number of Shields Shield Layer 1 Shield Layer 2 | LMR-200 50 Ohms Solid Copper PE (F) 2 Aluminum Tape Tinned Copper Braid |

LCCA30163-FT5 REV 1.0 | © 2019 Infinite Electronics, Inc. L-com is a registered trademark of Infinite Electronics, Inc.

USA & Canada +1(800) 341-5266 | International +1(978) 682-6936 | I-com.com



GLOBAL CONNECTIVITY SOLUTIONS

Low Loss TNC Male to TNC Male Cable Assembly using LMR-200 Coax, 5 FT with Times Microwave Components

LCCA30163-FT5

Jacket Material Jacket Diameter

One Time Minimum Bend Radius Repeated Minimum Bend Radius Bending Moment Flat Plate Crush Tensile Strength PE, Black 0.195 in [4.95 mm]

0.5 in [12.7 mm] 2 in [50.8 mm] 0.2 lbs-ft [0.27 N-m] 15 lbs/in [0.27 Kg/mm] 40 lbs [18.14 Kg]

Connectors

| Description | Connector 1 | Connector 2 |
|-----------------------------------|----------------------------|----------------------------|
| Туре | TNC Male | TNC Male |
| Specification | MIL-STD-348 | MIL-STD-348 |
| Impedance | 50 Ohms | 50 Ohms |
| Contact Material and Plating | Beryllium Copper, Gold | Beryllium Copper, Gold |
| Dielectric Type | PTFE | PTFE |
| Body Material and Plating | Brass, Tri-Metal | Brass, Tri-Metal |
| Coupling Nut Material and Plating | Phosphor Bronze, Tri-Metal | Phosphor Bronze, Tri-Metal |
| Hex Size | 5/8 Inch | 5/8 Inch |
| Seal Gasket Material | Silicone Rubber | Silicone Rubber |

Environmental Specifications

| Temperature | |
|-----------------|------------------|
| Operating Range | -40 to +85 deg C |
| Storage Range | -70 to +85 deg C |

Compliance Certifications (see product page for current document)

Plotted and Other Data Notes:

LCCA30163-FT5 REV 1.0 | © 2019 Infinite Electronics, Inc. L-com is a registered trademark of Infinite Electronics, Inc.






Low Loss TNC Male to TNC Male Cable Assembly using LMR-200 Coax, 5 FT with Times Microwave Components

LCCA30163-FT5

How to Order

Example:

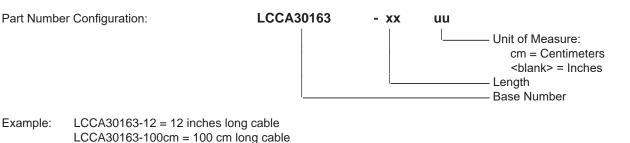

Low Loss TNC Male to TNC Male Cable Assembly using LMR-200 Coax, 5 FT with Times Microwave Components from L-com has same day shipment for domestic and International orders. L-com is a leading manufacturer of wired and wireless connectivity products and committed to in-stock availability and same day shipping. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.ontained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

Low Loss TNC Male to TNC Male Cable Assembly using LMR-200 Coax, 5 FT with Times Microwave Components

L-com CAD Drawing

