

Low Loss SMA Male to TNC Male Right Angle Cable Assembly using LMR-400-UF Coax With Times Microwave Components with HeatShrink



LCCA9900

Configuration

- Connector 1: SMA Male
- Connector 2: TNC Male Right Angle
- Cable Type: LMR-400-UF
- Coax Flex Type: Flexible

Description

L-com's LCCA9900 is a low loss SMA male to TNC male right angle cable assembly using LMR-400-UF coax with Times Microwave components with heatshrink and ships same-day. The LMR-400-UF coax of this SMA cable uses the PE (F) dielectric with a VoP of 85%, resulting in very low insertion loss compared to solid dielectrics. These flexible RF cable assemblies are ideal for applications where flexure is required. Our L-com SMA to TNC cable assembly has a male to male gender configuration with flexible LMR-400-UF series coax and operates to 5.8 GHz. The double shield of this SMA cable is layered by tinned copper braid over aluminum tape providing shielding effectiveness greater than 90dB. This right angle TNC cable interface on the LMR-400-UF coax allows for easier connections in tight spaces.

Custom versions of this SMA male to SMA male cable, along with the rest of L-com's other RF assemblies, can also be built and shipped same day. Other available RF cable assembly value added services from L-com include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly. Contact a sales representative for testing or custom RF cable quotes. Part number LCCA9900 L-com Low Loss SMA Male to TNC Male Right Angle Cable Assembly using LMR-400-UF Coax With Times Microwave Components with HeatShrink data sheet PDF includes details of the RF product specifications, CAD drawing(s) and dimensions below.

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|--------------------------------------|---------|--------------|---------|-----------------------|
| Frequency Range | DC | | 5.8 | GHz |
| VSWR | | | 1.5:1 | |
| Velocity of Propagation | | 85 | | % |
| RF Shielding | 90 | | | dB |
| Group Delay | | 1.2 [3.94] | | ns/ft [ns/m] |
| Capacitance | | 23.9 [78.41] | | pF/ft [pF/m] |
| Inductance | | 0.06 [0.2] | | uH/ft [uH/m] |
| DC Resistance Inner Conductor | | 1.07 [3.51] | | Ohms/1000ft [Ohms/Km] |
| DC Resistance Outer Conductor | | 1.65 [5.41] | | Ohms/1000ft [Ohms/Km] |
| Dielectric Withstanding Voltage (DC) | | | 2,500 | Vdc |
| Jacket Spark | | | 8,000 | Vrms |
| Input Power (Peak) | | | 16 | KWatts |

Specifications by Frequency

Low Loss SMA Male to TNC Male Right Angle Cable Assembly using LMR-400-UF Coax With Times Microwave Components with HeatShrink



LCCA9900

| Part Number | Length | Description | F1 | F2 | F3 | F4 | F5 | Units | Weight (lbs) |
|--------------|--------------------------|-----------------------|-----------|-------|-------|-------|------|-------|--------------|
| | | | Frequency | 250 | 500 | 1000 | 2500 | 5800 | |
| LCCA9900 | Custom Lengths Available | Insertion Loss (Typ.) | 0.023 | 0.034 | 0.049 | 0.081 | 0.13 | dB/ft | |
| | | | 0.08 | 0.12 | 0.17 | 0.27 | 0.43 | dB/m | |
| LCCA9900-12 | 12 inch | Insertion Loss (Typ.) | 0.33 | 0.34 | 0.35 | 0.39 | 0.43 | dB | 0.248 |
| LCCA9900-24 | 24 inch | Insertion Loss (Typ.) | 0.35 | 0.37 | 0.4 | 0.47 | 0.56 | dB | 0.335 |
| LCCA9900-36 | 36 inch | Insertion Loss (Typ.) | 0.37 | 0.41 | 0.45 | 0.55 | 0.69 | dB | 0.422 |
| LCCA9900-60 | 60 inch | Insertion Loss (Typ.) | 0.42 | 0.47 | 0.55 | 0.71 | 0.95 | dB | 0.596 |
| LCCA9900-300 | 300 inch | Insertion Loss (Typ.) | 0.88 | 1.15 | 1.53 | 2.33 | 3.55 | dB | 2.336 |

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.1 dB
 Loss due to Connector 2: 0.2 dB
 Base Weight: 0.248 pounds
 Additional Weight per Inch: 0.00725 pounds

Mechanical Specifications

Cable Assembly

Width/Diameter: 0.5 in [12.7 mm]
 Weight: 0.248 lbs [112.49 g]

Cable

Cable Type: LMR-400-UF
 Impedance: 50 Ohms
 Inner Conductor Type: Stranded
 Inner Conductor Material and Plating: Copper
 Dielectric Type: PE (F)
 Number of Shields: 2
 Shield Layer 1: Aluminum Tape
 Shield Layer 2: Tinned Copper Braid
 Jacket Material: TPE
 Jacket Diameter: 0.405 in [10.29 mm]
 One Time Minimum Bend Radius: 1 in [25.4 mm]
 Repeated Minimum Bend Radius: 4 in [101.6 mm]
 Bending Moment: 0.38 lbs-ft [0.52 N-m]

Low Loss SMA Male to TNC Male Right Angle Cable Assembly using LMR-400-UF Coax With Times Microwave Components with HeatShrink



LCCA9900

Connectors

| Description | Connector 1 | Connector 2 |
|-----------------------------------|------------------|----------------------|
| Type | SMA Male | TNC Male Right Angle |
| Impedance | 50 Ohms | 50 Ohms |
| Configuration | Straight | Right Angle |
| Contact Material and Plating | Brass, Gold | Brass, Silver |
| Contact Plating Specification | 50 µin Minimum | |
| Dielectric Type | Teflon | PTFE |
| Body Material and Plating | Brass, Tri-Metal | Brass, Silver |
| Coupling Nut Material and Plating | Brass, Tri-Metal | Brass, Silver |

Environmental Specifications

Operating Range Temperature -40 to +85 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:
Values at 25°C, sea level.

Low Loss SMA Male to TNC Male Right Angle Cable Assembly using LMR-400-UF Coax With Times Microwave Components with HeatShrink




LCCA9900

Typical Performance Data

How to Order

Part Number Configuration:

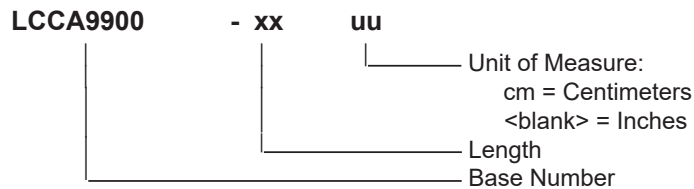

Example: LCCA9900-12 = 12 inches long cable
 LCCA9900-100cm = 100 cm long cable

Low Loss SMA Male to TNC Male Right Angle Cable Assembly using LMR-400-UF Coax With Times Microwave Components with HeatShrink from L-com has same day shipment for domestic and International orders. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

URL: <https://www.l-com.com/sma-male-tnc-male-cable-assembly-invalid-lcca9900-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

LCCA9900 CAD Drawing

Low Loss SMA Male to TNC Male Right Angle Cable Assembly using LMR-400-UF Coax With Times Microwave Components with HeatShrink

