

## Low Loss BNC Male to N Female Bulkhead Cable Assembly using LMR-240-UF Coax With Times Microwave Components with HeatShrink



### LCCA9917

#### Configuration

- Connector 1: BNC Male
- Connector 2: N Female Bulkhead
- Cable Type: LMR-240-UF
- Coax Flex Type: Flexible

#### Description

L-com's LCCA9917 is a low loss BNC male to N female bulkhead cable assembly using LMR-240-UF coax with Times Microwave components with heatshrink and ships same-day. The LMR-240-UF coax of this BNC cable uses the PE (F) dielectric with a VoP of 84%, resulting in very low insertion loss compared to solid dielectrics. These flexible RF cable assemblies are ideal for applications where flexure is required. Our L-com BNC to N cable assembly has a male to female gender configuration with flexible LMR-240-UF series coax and operates to 4 GHz. The double shield of this BNC cable is layered by tinned copper braid over aluminum tape providing shielding effectiveness greater than 90dB. L-com's RF cable assembly with N bulkhead interface enables system designers to have external connections on their product enclosures or to be used for other rack mount and panel mount applications.

Custom versions of this BNC male to BNC female cable, along with the rest of L-com's other RF assemblies, can also be built and shipped same day. Other available RF cable assembly value added services from L-com include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly. Contact a sales representative for testing or custom RF cable quotes. Part number LCCA9917 L-com Low Loss BNC Male to N Female Bulkhead Cable Assembly using LMR-240-UF Coax With Times Microwave Components with HeatShrink data sheet PDF includes details of the RF product specifications, CAD drawing(s) and dimensions below.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		4	GHz
VSWR			1.5:1	
Velocity of Propagation		84		%
RF Shielding	90			dB
Group Delay		1.21 [3.97]		ns/ft [ns/m]
Capacitance		24.2 [79.4]		pF/ft [pF/m]
Inductance		0.06 [0.2]		uH/ft [uH/m]
DC Resistance Inner Conductor		4.28 [14.04]		Ohms/1000ft [Ohms/Km]
DC Resistance Outer Conductor		3.89 [12.76]		Ohms/1000ft [Ohms/Km]
Dielectric Withstanding Voltage (DC)			1,500	Vdc
Jacket Spark			5,000	Vrms
Input Power (Peak)			5.6	KWatts

#### Specifications by Frequency

Low Loss BNC Male to N Female Bulkhead Cable Assembly using LMR-240-UF Coax With Times Microwave Components with HeatShrink



**LCCA9917**

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
			Frequency	100	250	500	1000	4000	
LCCA9917	Custom Lengths Available	Insertion Loss (Typ.)	0.028	0.046	0.066	0.095	0.195	dB/ft	
			0.1	0.16	0.22	0.32	0.64	dB/m	
LCCA9917-12	12 inch	Insertion Loss (Typ.)	0.23	0.25	0.27	0.3	0.4	dB	0.156
LCCA9917-24	24 inch	Insertion Loss (Typ.)	0.26	0.3	0.34	0.39	0.59	dB	0.189
LCCA9917-36	36 inch	Insertion Loss (Typ.)	0.29	0.34	0.4	0.49	0.79	dB	0.221
LCCA9917-60	60 inch	Insertion Loss (Typ.)	0.34	0.43	0.53	0.68	1.18	dB	0.285
LCCA9917-300	300 inch	Insertion Loss (Typ.)	0.9	1.35	1.85	2.58	5.08	dB	0.925

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.1 dB  
 Loss due to Connector 2: 0.1 dB  
 Base Weight: 0.156 pounds  
 Additional Weight per Inch: 0.00267 pounds

**Mechanical Specifications**

**Cable Assembly**

Width/Diameter 0.5 in [12.7 mm]  
 Weight 0.156 lbs [70.76 g]

**Cable**

Cable Type LMR-240-UF  
 Impedance 50 Ohms  
 Inner Conductor Type Stranded  
 Inner Conductor Material and Plating Copper  
 Dielectric Type PE (F)  
 Number of Shields 2  
 Shield Layer 1 Aluminum Tape  
 Shield Layer 2 Tinned Copper Braid  
 Jacket Material TPE  
 Jacket Diameter 0.24 in [6.1 mm]  
 One Time Minimum Bend Radius 0.75 in [19.05 mm]  
 Repeated Minimum Bend Radius 2.5 in [63.5 mm]  
 Bending Moment 0.13 lbs-ft [0.18 N-m]

Low Loss BNC Male to N Female Bulkhead Cable Assembly using LMR-240-UF Coax With Times Microwave Components with HeatShrink



**LCCA9917**

**Connectors**

Description	Connector 1	Connector 2
Type	BNC Male	N Female Bulkhead
Specification	MIL-STD-348	MIL-STD-348
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Contact Material and Plating	Brass, Gold	Beryllium Copper, Gold
Dielectric Type	PTFE	PTFE
Outer Conductor Material and Plating		Brass, Tri-Metal
Body Material and Plating	Brass, Nickel	Brass, Tri-Metal
Coupling Nut Material and Plating	Brass, Nickel	

**Environmental Specifications**

Operating Range Temperature -40 to +85 deg C

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:  
Values at 25°C, sea level.

Low Loss BNC Male to N Female Bulkhead Cable Assembly using LMR-240-UF Coax With Times Microwave Components with HeatShrink



**LCCA9917**

**Typical Performance Data**


**How to Order**

Part Number Configuration:

**LCCA9917**

**- xx**

**uu**

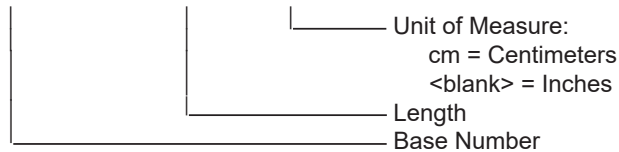

Example: LCCA9917-12 = 12 inches long cable  
LCCA9917-100cm = 100 cm long cable

Low Loss BNC Male to N Female Bulkhead Cable Assembly using LMR-240-UF Coax With Times Microwave Components with HeatShrink from L-com has same day shipment for domestic and International orders. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

URL: <https://www.l-com.com/bnc-male-n-female-cable-assembly-invalid-lcca9917-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

# LCCA9917 CAD Drawing

Low Loss BNC Male to N Female Bulkhead Cable Assembly using LMR-240-UF Coax With Times Microwave Components with HeatShrink

