

6

5

4

3

2


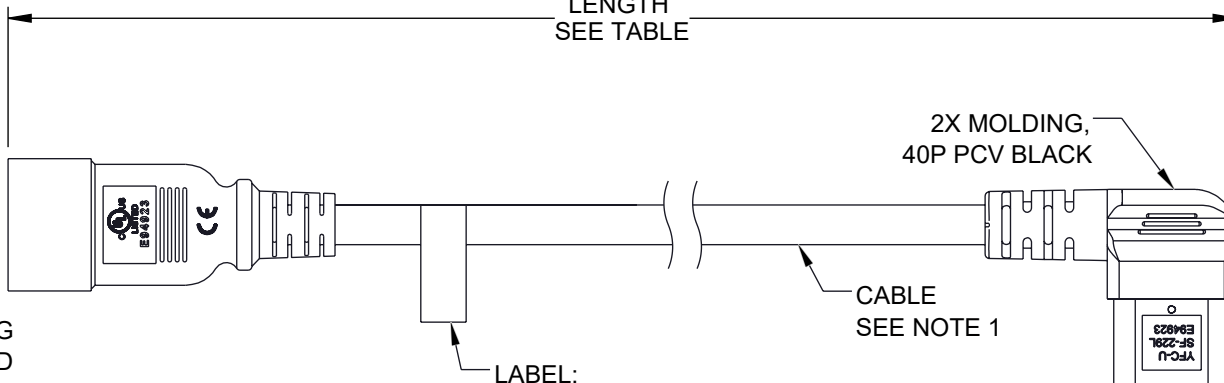
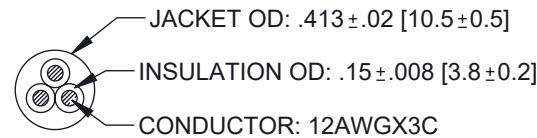


1

## REVISION

ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	B	ECO-14335	02/11/2025	DMAY	DGUST

F

F

LENGTH  
SEE TABLEC20 MALE PLUG  
NICKEL PLATED  
TERMINALS2X MOLDING,  
40P PCV BLACKCABLE  
SEE NOTE 1LABEL:  
INDOOR USE LABEL 20A 250VC21 LA FEMALE PLUG  
BRASS  
TERMINALSN WHITE  
E GREEN  
L BLACK

D

D

C

C

## NOTES:

- CABLE:  
SJT 12AWG 3C 105°C 300V VW-1 JACKET: PVC, BLACK  
MARKING (NO.682): (UL) E135710-F5 SJT 3X12AWG 105°C 300V VW-1  
C(UL) SJT 3X3.31MM2(12AWG) 105°C 300V FT2
- ELECTRICAL CHARACTERISTICS:  
DIELECTRIC VOLTAGE WITHSTAND TEST: 1500V / 1 SEC  
CONDUCTOR RESISTANCE ≤ 5.69Ω/1000M AT 20°C  
VOLTAGE RATING: AC 300V AT 20°C.
- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED.

REGULATORY COMPLIANCE:  
EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION).

ITEM NO.	LENGTH	
	METERS [MM]	FT [IN]
PCS12L2-BLK-6F	1.83 [±30]	6.0 [±1.18]
PCS12L2-BLK-10F	3.05 [±30]	10.0 [±1.18]
PCS12L2-BLK-15F	4.57 [±30]	15.0 [±1.18]


B

B

A

A

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED  
LEADING DIMENSIONS ARE INCHES  
DIMENSIONS IN [ ] ARE MILLIMETERSTOLERANCES:  
X = ±.2 [5]      FRACTIONS ± 1/32  
.XX = ±.02 [0.5]      ANGLES ± 1°  
.XXX = ±.005 [0.13]CABLE LENGTH TOLERANCES:  
≤12 [305] = +1 [25] / -0  
>12 [305] ≤ 60 [1524] = +2 [51] / -0  
>60 [1524] ≤ 120 [3048] = +4 [102] / -0  
>120 [3048] ≤ 300 [7620] = +6 [152] / -0  
>300 [7620] = +5% / -0ALL DIMENSIONS ARE FOR REFERENCE ONLY  
AND SUBJECT TO CHANGE WITHOUT NOTICE.  
UN-DIMENSIONED/NON-CRITICAL FEATURES  
MAY VARY IN SIZE AND LOCATION  
COLORS MAY VARY**L-com**  
an INFINIT@ brandWebsite: www.L-com.com  
Phone: 1.800.341.5266 | 1.978.682.6936INTERPRET ALL DIMENSIONS AND  
TOLERANCES PER ASME Y14.5

SCALE: NONE      SHEET: 1 OF 1

DESCRIPTION

C20-C21 LA HIGH TEMP POWER CORD, 20 AMP

SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	43321	TDUFRENE	PCS12L2-BLK	B

6

5

4

3

2

1