


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

| REVISIONS |                 |            |            |
|-----------|-----------------|------------|------------|
| REV       | DESCRIPTION     | DATE       | APPROVED   |
| A         | INITIAL RELEASE | 03/12/2021 | GUTTADAURO |
|           |                 |            |            |
|           |                 |            |            |

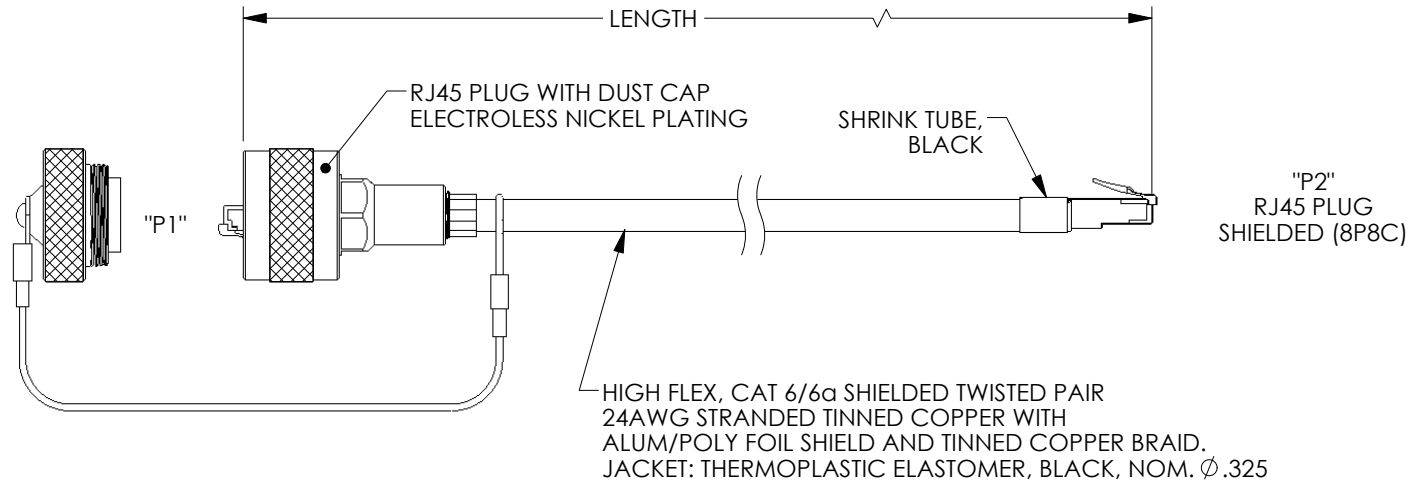

**NOTES:**

**JACKET PROPERTIES:**  
 JACKET IS SUNLIGHT RESISTANT, WELD SPLATTER RESISTANT,  
 AND CUTTING/MACHINING OIL RESISTANT.  
 TEMPERATURE RANGE: -40° C TO +75° C

**FLEX LIFE:**  
 1 MILLION CYCLE TEST (10X CABLE O.D. MINIMUM RADIUS)  
 10 MILLION CYCLE TEST (20X CABLE O.D. MINIMUM RADIUS)

**AGENCY APPROVALS:**  
 NEC (UL) TYPE CMX OUTDOOR - CM  
 CEC C(UL) TYPE CMX OUTDOOR - CM  
 UL AWM STYLE 2463


**VOLTAGE RATING:** 600 V MAX.

**CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.**

**CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.**

**REGULATORY COMPLIANCE:**  
 EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

| MODEL NUMBER  | LENGTH METERS [FEET] |
|---------------|----------------------|
| TRG695RG4-05M | 0.5 [1.64]           |
| TRG695RG4-1M  | 1.0 [3.28]           |
| TRG695RG4-2M  | 2.0 [6.56]           |
| TRG695RG4-3M  | 3.0 [9.84]           |
| TRG695RG4-5M  | 5.0 [16.41]          |
| TRG695RG4-10M | 10.0 [32.81]         |

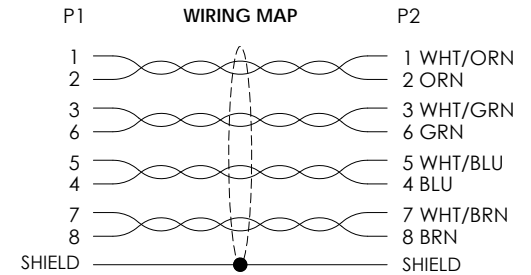

|  |  |  |   |   |
|--|--|--|---|---|
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]<br>OVERALL CABLE LENGTH TOLERANCE:<br>≤12 [305] = +1 [25] / -0<br>>12 [305] ≤60 [1524] = +2 [51] / -0<br>>60 [1524] ≤120 [3048] = +4 [102] / -0<br>>120 [3048] ≤300 [7620] = +6 [152] / -0<br>>300 [7620] = +5% / -0<br>ALL OTHER DIMENSIONAL TOLERANCES:<br>.X = ± .2 [5]      FRACTIONS ± 1/32<br>.XX = ± .02 [5]      ANGLES ± 1°<br>.XXX = ± .005 [13] | APPROVALS<br>DRAWN BY DFRISIELLO<br>CHECKED BY GUTTADAURO<br>APPROVED BY GUITA DAURO   | DATE<br>03/12/2021<br>03/12/2021<br>03/12/2021 | an INFINITI brand<br>50 High Street, West Mill, North Andover, MA 01845 USA.<br>Phone: 1.800.341.5266<br>1.978.682.6936 |   |
|  | CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY<br>COLOR VARIATIONS MAY OCCUR | CATEGORY<br>TELECOM/MODULAR                    |   | PRODUCT DESCRIPTION<br>IP68 RGRJ45P RJ45P ENICK TPE BLK |
| THIRD-ANGLE PROJECTION<br>   | SIZE<br>A  | CAGE CODE<br>43321                             | ITEM NO.<br>TRG695RG4   | REV.<br>A   |
| SCALE: NONE  |  | CAD FILE: TRG695RG4.SLDDRW                     |   | SHEET 1 OF 1  |